



BLOOM

Recessed Mounted 60x120cm 60 W LED Luminaire



Order Code : 3209660
Product Code : BLM 060T 40OD00 7K7 601265

Product Data

Standard Features

Housing	: 0,80mm Recessed mounted RAL9003 Powder finished sheet steel
Diffuser	: Opal diffuser
Ceiling Type	: Rock-wool
IP Grade	: IP65
Installation	: Recessed mounted
Light Source	: Mid Power LED


Optical & Electrical Features

Power Consumption	: 60.7 W
Final Luminous Flux	: 7732.9 lm
Efficacy	: 127.3 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Other Features & Conditions

Operating Temperature Range	: -20 °C/+50 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK 02
Led Life Time - L70	: > 72.000 hours @ Ta=50 °C

Photometric Curve

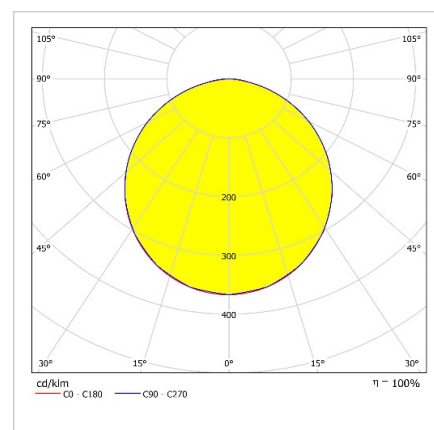


Optional Features

Ceiling Types	: Plasterboard, clip-in, surface mounted
Correlated Color Temperatures	: 3000K, 5700K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes
Color Option	: RAL 9005, 9010

BLOOM


Recessed Mounted 60x120cm 60 W LED Luminaire

3209660 BLM 060T 40OD00 7K7 601265

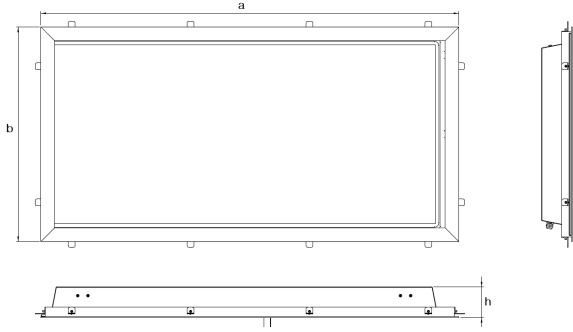

Dimensions (mm)

	a	b	h	d ¹ , d ²
Rock-wool	1195	595	95	N/A
Plasterboard	1230	630	95	1210X610
Clip-in	1200	600	95	N/A

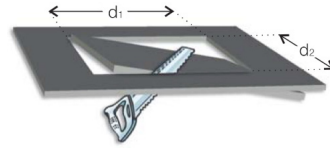

Weight (kg)

Standard	16,9
With Emergency Kit (1 hr.)	17
With Emergency Kit (3 hrs.)	17,4

- EAE, reserves the right to make changes without prior notice.



Revision date: 10.08.2022