



# BLOOM

Recessed Mounted 60x120cm 28 W LED Luminaire



Order Code : 3209360  
Product Code : BLM 028T 40OD00 3K8 601220

## Product Data

### Standard Features

Housing	: 0,50mm Recessed mounted RAL9003 : Powder finished sheet steel
Diffuser	: Opal diffuser
Ceiling Type	: Rock-wool
IP Grade	: IP20
Installation	: Recessed mounted
Light Source	: Mid Power LED


### Optical & Electrical Features

Power Consumption	: 27.9 W
Final Luminous Flux	: 3874.9 lm
Efficacy	: 138.8 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

### Other Features & Conditions

Operating Temperature Range	: -20 °C/+40 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK 02
Led Life Time - L70	: > 72.000 hours @ Ta=40 °C

## Photometric Curve

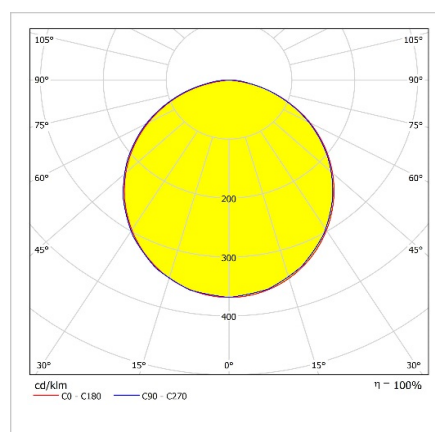


### Optional Features

Ceiling Types	: Plasterboard, clip-in
Correlated Color Temperatures	: 4000K, 5700K
Emergency Kit Options	: 1, 3 hours
Color Option	: RAL 9005, 9010
Electronic Control	: Dali

# BLOOM


Recessed Mounted 60x120cm 28 W LED Luminaire

**3209360** BLM 028T 40OD00 3K8 601220

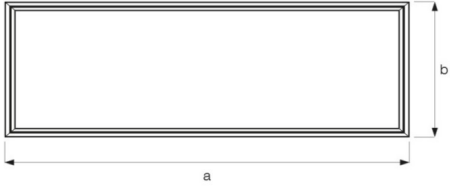

## Dimensions (mm)

	a	b	h	d <sup>1</sup> , d <sup>2</sup>
Rock-wool	1195	595	100	N/A
Plasterboard	1195	595	100	1175x575
Clip-in	1200	600	100	N/A

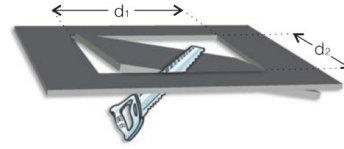

## Weight (kg)

Standard	10
With Emergency Kit (1 hr.)	10.3
With Emergency Kit (3 hrs.)	10,5

- EAE, reserves the right to make changes without prior notice.



Revision date: 26.05.2021