



BLOOM

Recessed Mounted 30x120cm 60 W LED Luminaire



Order Code : 3209420
Product Code : BLM 060T 40OD00 6K9 301265

Product Data

Standard Features

Housing	: 0,80mm Recessed mounted RAL9003 : Powder finished sheet steel
Diffuser	: Opal diffuser
Ceiling Type	: Plasterboard
IP Grade	: IP65
Installation	: Recessed mounted
Light Source	: Mid Power LED


Optical & Electrical Features

Power Consumption	: 59.7 W
Final Luminous Flux	: 6982.9 lm
Efficacy	: 116.7 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Other Features & Conditions

Operating Temperature Range	: -20 °C/+40 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK07
Led Life Time - L70	: > 72.000 hours @ Ta=40 °C

Photometric Curve

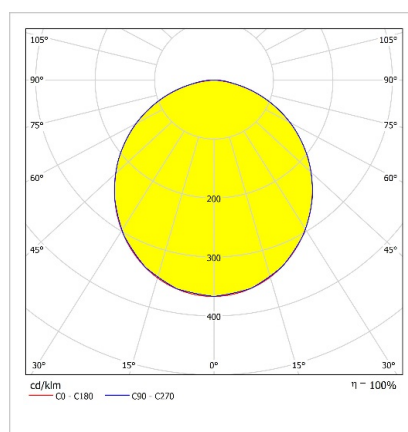

Optional Features

Emergency Kit Options : 1, 3 hours

BLOOM


Recessed Mounted 30x120cm 60 W LED Luminaire

3209420 BLM 060T 400D00 6K9 301265



Dimensions (mm)

	a	b	h	d ¹ , d ²
Rock-wool	1195	295	95	N/A
Plasterboard	1230	330	95	1210x310
Clip-in	1200	300	95	N/A

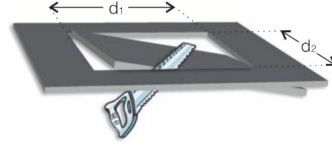

Weight (kg)

Standard	9,4
With Emergency Kit (1 hr.)	10,4
With Emergency Kit (3 hrs.)	10,5

- EAE, reserves the right to make changes without prior notice.



Revision date: 10.08.2022