



BLOOM

Surface Mounted 60x120cm 30 W LED Luminaire



Order Code : 3209701
Product Code : BLM 030U 40OD00 3K8 601265

Product Data

Standard Features

| | |
|--------------|-----------------------------------------------------------------|
| Housing | : 0,80mm Surface mounted RAL9003 Powder finished sheet steel |
| Diffuser | : Opal diffuser |
| IP Grade | : IP65 |
| Installation | : Surface mounted |
| Light Source | : Mid Power LED |


Optical & Electrical Features

| | |
|------------------------------|----------------|
| Power Consumption | : 30.1 W |
| Final Luminous Flux | : 3894.5 lm |
| Efficacy | : 129.1 lm/W |
| Input Voltage | : 220-240 V AC |
| Frequency | : 50-60 Hz |
| Power Factor | : > 0,9 |
| Surge Transient Protection | : 1 kV |
| Correlated Color Temperature | : 4000K |
| Color Rendering Index | : >80 |

Other Features & Conditions

| | |
|-----------------------------|-----------------------------|
| Operating Temperature Range | : -20 °C/+40 °C |
| Impact Resistance | : IK 02 |
| Led Life Time - L70 | : > 72.000 hours @ Ta=40 °C |

Photometric Curve

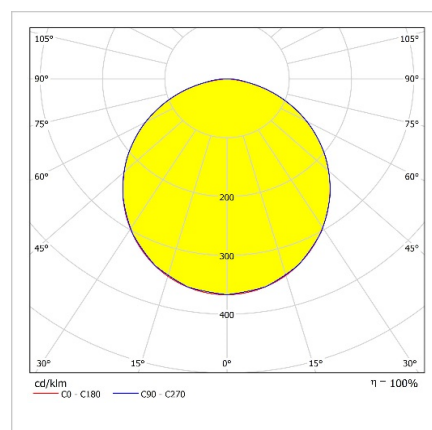



Optional Features

| | |
|-------------------------------|------------------|
| Correlated Color Temperatures | : 3000K, 5700K |
| Emergency Kit Options | : 1, 3 hours |
| DALI Option | : Yes |
| Color Option | : RAL 9005, 9010 |

BLOOM

Surface Mounted 60x120cm 30 W LED Luminaire

3209701 BLM 030U 40OD00 3K8 601265

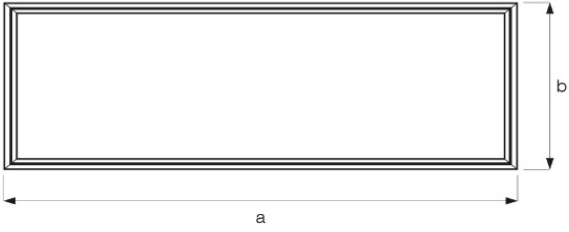

Dimensions (mm)

| | a | b | h | d ¹ , d ² |
|-----------------|------|-----|-----|---------------------------------|
| Surface mounted | 1200 | 630 | 100 | N/A |

Weight (kg)

| | |
|----------|------|
| Standard | 15,3 |
|----------|------|



- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 08.09.2020