



## BLOOM

Surface Mounted 60x120cm 60 W LED Luminaire



Order Code : 3209271  
Product Code : BLM 060U 40OD00 7K1 601265

### Product Data

#### Standard Features

|              |   |
|--------------|---|
| Housing      | : 0,80mm Surface mounted RAL9003<br>: Powder finished sheet steel |
| Diffuser     | : Opal diffuser   |
| IP Grade     | : IP65  |
| Installation | : Surface mounted   |
| Light Source | : Mid Power LED   |


#### Optical & Electrical Features

|                              |                |
|------------------------------|----------------|
| Power Consumption            | : 58.9 W       |
| Final Luminous Flux          | : 7162.6 lm    |
| Efficacy                     | : 121.4 lm/W   |
| Input Voltage                | : 220-240 V AC |
| Frequency                    | : 50-60 Hz     |
| Power Factor                 | : > 0,9        |
| Surge Transient Protection   | : 1 kV         |
| Correlated Color Temperature | : 4000K        |
| Color Rendering Index        | : >80          |

#### Other Features & Conditions

|                             |                             |
|-----------------------------|-----------------------------|
| Operating Temperature Range | : -20 °C/+40 °C             |
| Impact Resistance           | : IK 02                     |
| Led Life Time - L70         | : > 72.000 hours @ Ta=40 °C |

### Photometric Curve

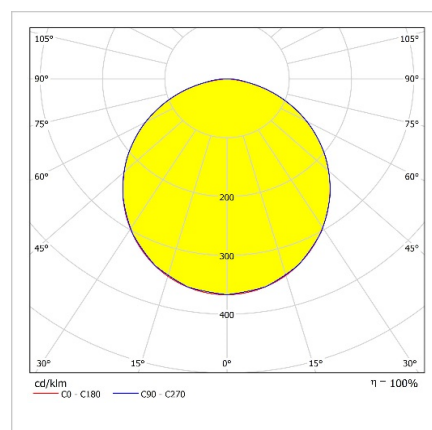



#### Optional Features

|                               |                  |
|-------------------------------|------------------|
| Correlated Color Temperatures | : 3000K, 5700K   |
| Emergency Kit Options         | : 1, 3 hours     |
| DALI Option                   | : Yes            |
| Color Option                  | : RAL 9005, 9010 |

# BLOOM

Surface Mounted 60x120cm 60 W LED Luminaire

3209271 BLM 060U 40OD00 7K1 601265

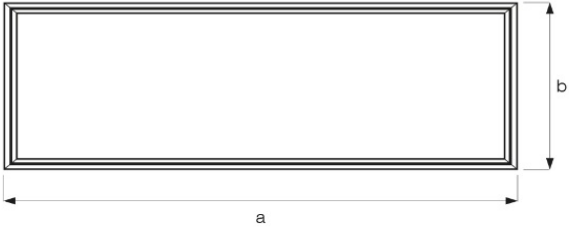

## Dimensions (mm)

|                 | a    | b   | h   | d <sup>1</sup> , d <sup>2</sup> |
|-----------------|------|-----|-----|---------------------------------|
| Surface mounted | 1200 | 630 | 100 | N/A                             |

## Weight (kg)

|          |      |
|----------|------|
| Standard | 15,3 |
|----------|------|



- EAE, reserves the right to make changes without prior notice.



### EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
[www.eaeaydinlatma.com.tr](http://www.eaeaydinlatma.com.tr)

Revision date: 08.09.2020