



BLOOM

Recessed Mounted 30x120cm 60 W LED Luminaire



Order Code : 3225069
Product Code : BLM 060T 40OD00 7K1 301220

Product Data

Standard Features

Housing	: 0,50mm Recessed mounted RAL9003 Powder finished sheet steel
Diffuser	: Opal diffuser
Ceiling Type	: Rock-wool
IP Grade	: IP20
Installation	: Recessed mounted
Light Source	: Mid Power LED


Optical & Electrical Features

Power Consumption	: 61.9 W
Final Luminous Flux	: 7173.1 lm
Efficacy	: 115.8 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Other Features & Conditions

Operating Temperature Range	: -20 °C/+40 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 72.000 hours @ Ta=40 °C

Photometric Curve

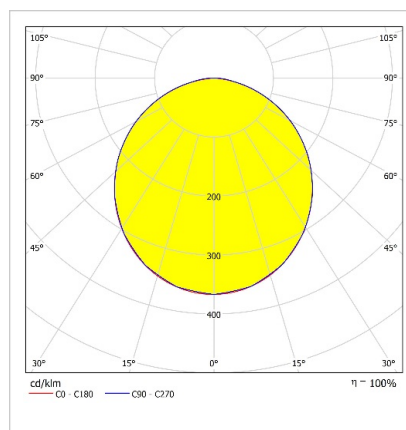


Optional Features

Ceiling Types	: Plasterboard, clip-in and rock-wool
Correlated Color Temperatures	: 3000K, 5700K
Emergency Kit Options	: 1-3 hours
DALI Option	: Yes
Color Option	: RAL 9005, 9010

BLOOM


Recessed Mounted 30x120cm 60 W LED Luminaire

3225069 BLM 060T 400D00 7K1 301220

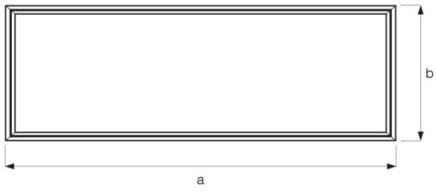

Dimensions (mm)

	a	b	h	d ¹ , d ²
Rock-wool	1195	295	75	N/A
Plasterboard	1195	295	75	1155x255
Clip-in	1200	300	75	N/A
Surface mounted	1210	300	65	N/A

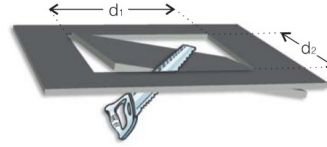

Weight (kg)

Standard	4,8
With Emergency Kit (1 hr.)	6
With Emergency Kit (3 hrs.)	6,2

- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 10.03.2021