



APLIKLED

7 W Up/Down LED Wall Mount Sconce

Order Code : 3057138
Product Code : APL 008U 57CM00 11 CIFT



Product Data

Standard Features

| | |
|--------------|--|
| Housing | : RAL 9005 Powder finished aluminium housing |
| Diffuser | : Transparent glass with tempered |
| Optic | : 11° lens |
| IP Grade | : IP66 |
| Installation | : Surface mounted |
| Light Source | : Power LED |


Optical & Electrical Features

| | |
|------------------------------|---------------|
| Power Consumption | : 7.4 W |
| Final Luminous Flux | : 670 lm |
| Efficacy | : 89.7 lm/W |
| Input Voltage | : 220-240V AC |
| Frequency | : 50-60 Hz |
| Power Factor | : > 0,9 |
| Drive Current | : 350 mA |
| Correlated Color Temperature | : 5700K |
| Color Rendering Index | : >70 |

Other Features & Conditions

| | |
|-----------------------------|-----------------------------|
| Operating Temperature Range | : -20 °C/+30 °C |
| Impact Resistance | : IK02 |
| Led Life Time - L70 | : > 60.500 hours @Ta= 30 °C |

Photometric Curve

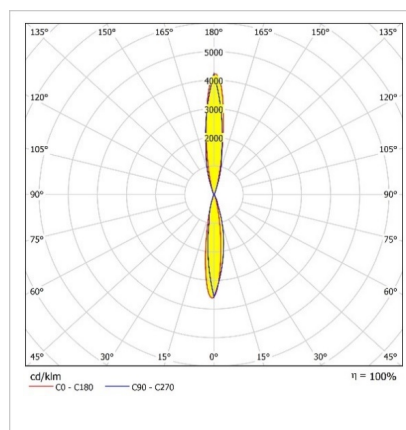


Optional Features

| | |
|-------------------------------|----------------------|
| Correlated Color Temperatures | : 3000K, 4000K |
| Color Option | : RAL 9006, RAL 9007 |

APLIKLED

7 W Up/Down LED Wall Mount Sconce

3057138 APL 008U 57CM00 11 CIFT

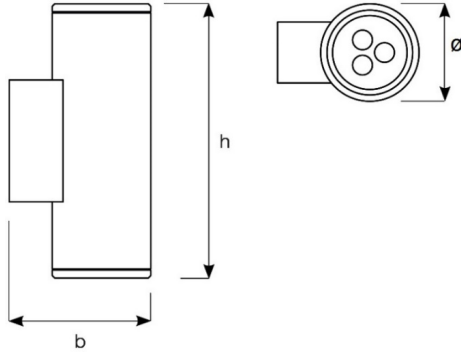

Dimensions (mm)


| | Ø | b | h |
|----------|----|-----|-----|
| Standard | 80 | 115 | 225 |

Weight (kg)


| | |
|----------|-----|
| Standard | 1,3 |
|----------|-----|




18 Degrees Photometric Curve

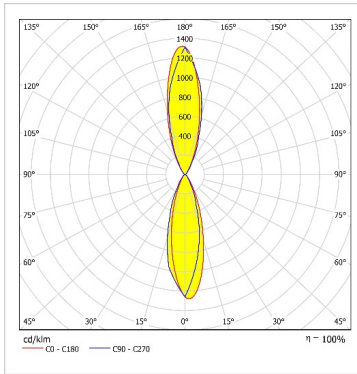

31 Degrees Photometric Curve

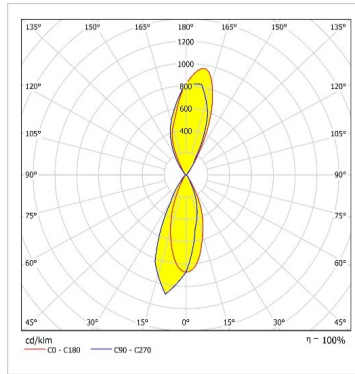

44 Degrees Photometric Curve

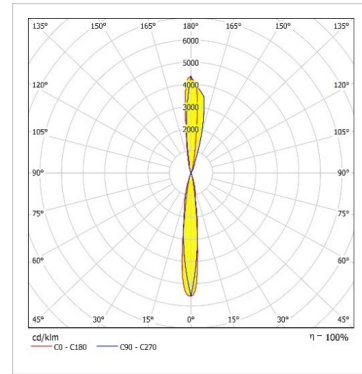

- EAE Aydınlatma reserves the right to make any change without prior notice.



Revision date: 02.06.2018