

STL FRAME FLP

106 W Pendant LED Luminaire

Order Code : 3245558
Product Code : STL 106S 400D00 10K2 5070TK3I 4012 FR FLP




Product Data

Standard Features

Housing	: Aluminium extrusion housing
Diffuser	: Glare minimizing highly permeable diffuser
IP Grade	: IP 20
Installation	: Pendant
Light Source	: Mid Power LED
Electronic Control	: On/Off

Photometric Curve

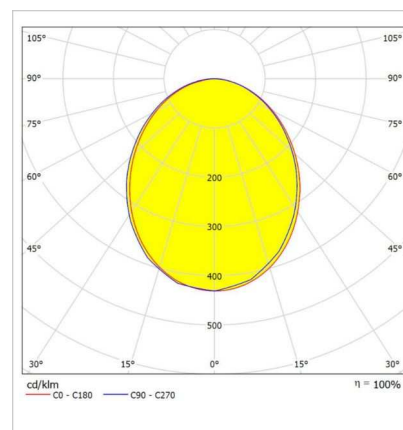

Optical & Electrical Features

Power Consumption	: 106 W
Final Luminous Flux	: 10.272 lm
Efficacy	: 96,91 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

* There is ± 10% Tolerance in Technical Values.

Other Features & Conditions

Operating Temperature Range	: -5 °C/+35 °C
Impact Resistance	: IK 02
Led Life Time - L70	: 100.000 saat @Ta= 35 °C


Optional Features

Correlated Color Temperatures	: 3000K, 6500K
Emergency Kit Options	: Yes
DALI Option	: Yes

STL FRAME FLP


106 W Pendant LED Luminaire

3245558 STL 106S 40OD00 10K2 5070TK3I 4012 FR FLP

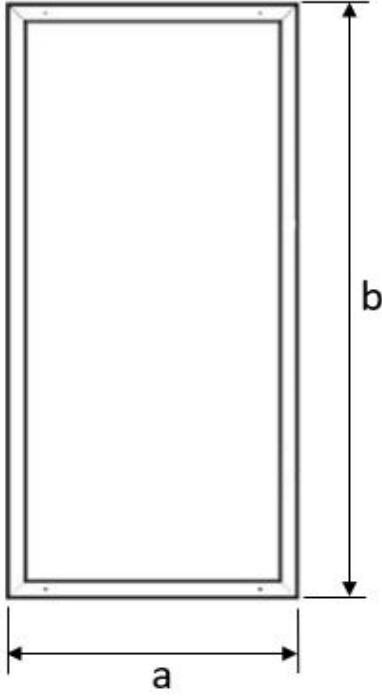

Dimensions (mm)

	a	b	h	c
Tekli Modül	400	1200	70	50




Steel Wire Suspension Kit (1,5 mt)

Order Code : 3242453

Product Code : STL ASKI TAKIMI FLP

- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 04.03.2021