



## FRAME

38 W Pendant LED Luminaire

Order Code : 3106988  
Product Code : STL 038U 40OD00 3K9 60603I FR4XMN



### Product Data

#### Standard Features

Housing	: RAL 7047 Powder finished aluminium extrusion housing
Diffuser	: Glare minimizing highly permeable diffuser
IP Grade	: IP20
Installation	: Pendant
Light Source	: Mid Power LED


#### Optical & Electrical Features

Power Consumption	: 37.8 W
Final Luminous Flux	: 3973.3 lm
Efficacy	: 105.1 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 1050 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

#### Other Features & Conditions

Operating Temperature Range	: -25 °C/+40 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 60.000 hours @Ta= 40 °C

### Photometric Curve

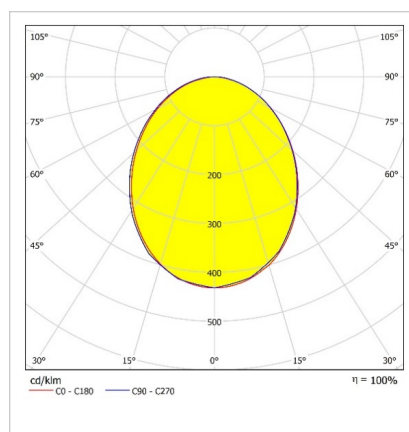


#### Optional Features

Correlated Color Temperatures	: 3000K, 6500K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes
Color Option	: RAL 9005

## FRAME

38 W Pendant LED Luminaire

3106988 STL 038U 40OD00 3K9 60603I FR4XMN

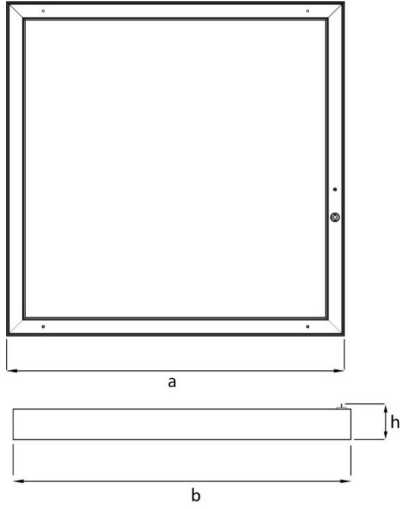

Dimensions (mm)


	a	b	h
Standard	658	658	105

Weight (kg)

Standard	6,3
With Emergency Kit (1 hr.)	6,5
With Emergency Kit (3 hrs.)	6,5



## Suspension Set



Dimensions (mm)

	a	b	h	Ø
Twin Mounting Set	1m - 2m - 3m	60	1,5	15

- EAE, reserves the right to make changes without prior notice.



Revision date: 31.01.2018