



GPRONA MINI

133 W Front and Area LED Lighting Luminaires

Order Code : 3250321
Product Code : GPR 133Z 40CM00 AS 21K8 V.MN



Product Data

Standard Features

| | |
|--------------|---|
| Housing | : SW 306G painted aluminium injection housing |
| Diffuser | : Tempered transparent glass |
| Optic | : Asymmetric reflector |
| IP Grade | : IP66 |
| Installation | : Floor, wall, pole mounted |
| Light Source | : Mid Power Led |


Optical & Electrical Features

| | |
|------------------------------|----------------|
| Power Consumption | : 133.3 W |
| Final Luminous Flux | : 21841.6 lm |
| Efficacy | : 163.8 lm/W |
| Input Voltage | : 220-240 V AC |
| Frequency | : 50-60 Hz |
| Power Factor | : > 0,9 |
| Surge Transient Protection | : 6 kV |
| Correlated Color Temperature | : 4000K |
| Color Rendering Index | : >80 |

Other Features & Conditions

| | |
|-----------------------------|------------------------------|
| Operating Temperature Range | : -25 °C/+50 °C |
| Impact Resistance | : IK09 |
| Led Life Time - L70 | : > 102.000 hours @Ta= 50 °C |

Photometric Curve

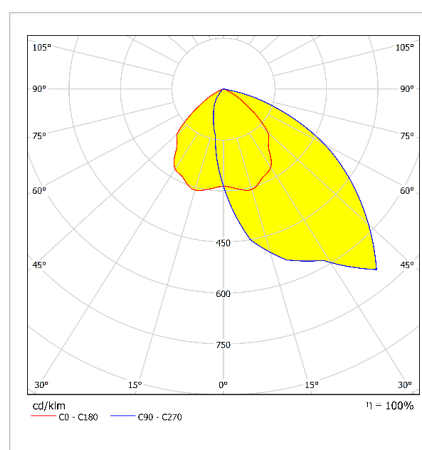


Optional Features

| | |
|-------------------------------|-----------------------|
| Correlated Color Temperatures | : 5000K, 5700K, 6500K |
| Electronic Control | : Dali , RF |

GPRONA MINI

133 W Front and Area LED Lighting Luminaires

3250321 GPR 133Z 40CM00 AS 21K8 V.MN

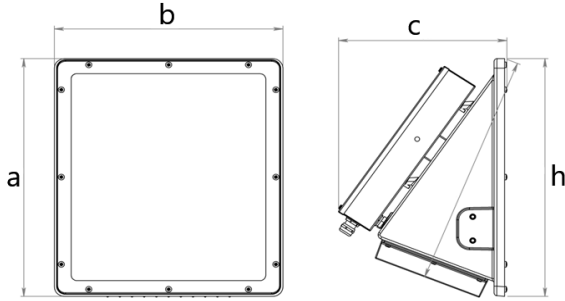



Dimensions (mm)

| | a | b | c | h |
|----------|-----|-----|-----|-----|
| Standard | 420 | 375 | 276 | 420 |

Weight (kg)

| | |
|----------|------|
| Standard | 11,8 |
|----------|------|



Suspension Set



Tall Hanger Set

Ordering Code : 3177884


| a | b | h |
|-------|------|-------|
| 426mm | 50mm | 344mm |



Short Hanger Set

Ordering Code : 3177883

| a | b | h |
|-------|------|-------|
| 426mm | 50mm | 264mm |

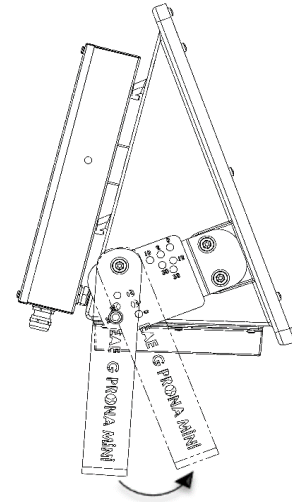

- EAE, reserves the right to make changes without prior notice.



Revision date: 10.08.2020