



GPRONA V.2

136 W Front and Area LED Lighting Luminaires

Order Code : 3182829
Product Code : GPR 136Z 50CM00 AS 21K5 V2



Product Data


Standard Features

Housing	: SW 306G painted aluminium injection housing
Diffuser	: Tempered transparent glass
Optic	: Asymmetric reflector
IP Grade	: IP66
Installation	: Floor, wall, pole mounted
Light Source	: Mid Power Led

Optical & Electrical Features

Power Consumption	: 136.2 W
Final Luminous Flux	: 21592.9 lm
Efficacy	: 158.4 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Photometric Curve

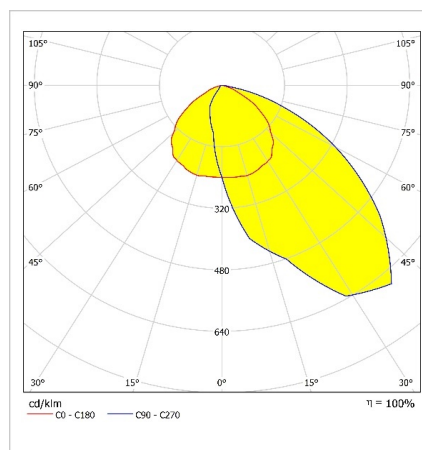

Other Features & Conditions

Operating Temperature Range	: -25 °C/+50 °C
Impact Resistance	: IK09
Led Life Time - L70	: > 60.000 hours @Ta= 50 °C


Optional Features

Correlated Color Temperatures	: 5000K, 5700K
Electronic Control	: Dali , 1-10 V DIMKO

GPRONA V.2

136 W Front and Area LED Lighting Luminaires

3182829 GPR 136Z 50CM00 AS 21K5 V2

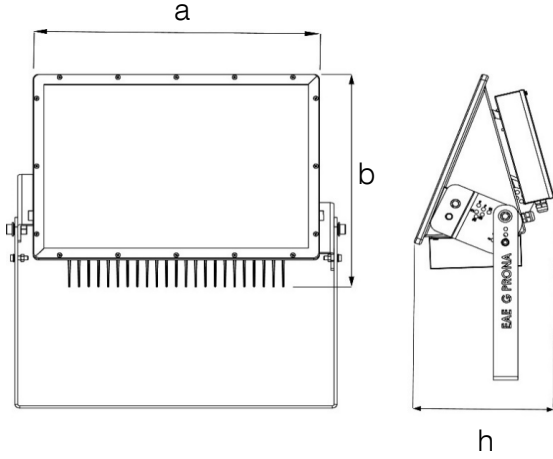

Dimensions (mm)


	a	b	h
Standard	589	410	296

Weight (kg)

Standard	25.2
----------	------




Suspension Set

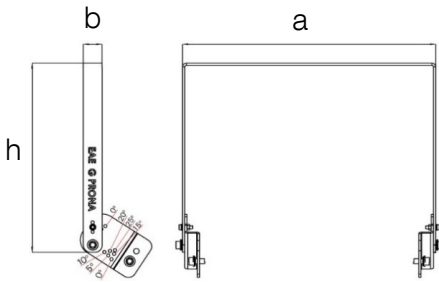

Tall Hanger Set

Ordering Code : 3116720


a	b	h	Weight (kg)
662mm	50mm	506mm	3.68

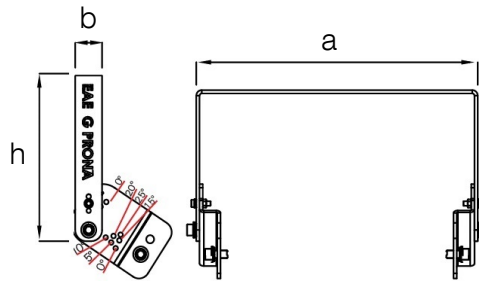

Short Hanger Set

Ordering Code : 3117816

a	b	h	Weight (kg)
662mm	50mm	306mm	2.81

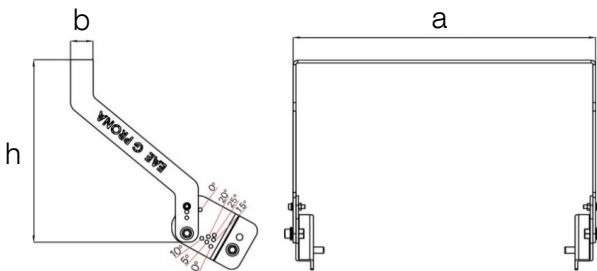


Angled Hanger Set

Ordering Code : 3114842

a	b	h	Weight (kg)
662mm	50mm	406mm	3.76

Hanger Set Bore Diameter Measures

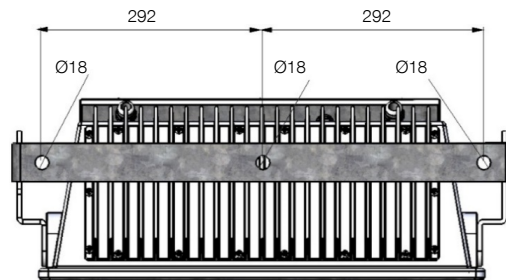

- EAE, reserves the right to make changes without prior notice.



Revision date: 14.08.2020