



LORY IP65

Recessed Mounted 14 W Spot LED Luminaire

Order Code : 3203268
Product Code : LRY 014A 40CM00 36 1K3 65 YV FLP



Product Data

Standard Features


| | |
|--------------------|-------------------------|
| Housing | : Aluminium housing |
| Diffuser | : 36° reflector + Glass |
| Ceiling Type | : Plasterboard |
| IP Grade | : IP65 |
| Installation | : Recessed mounted |
| Light Source | : COB LED |
| Electronic Control | : On-Off |

Optical & Electrical Features

| | |
|------------------------------|----------------|
| Power Consumption | : 14 W |
| Final Luminous Flux | : 1281 lm |
| Efficacy | : 91,5 lm/W |
| Input Voltage | : 220-240 V AC |
| Frequency | : 50-60 Hz |
| Power Factor | : Cos Ø > 0,9 |
| Correlated Color Temperature | : 4000K |
| Color Rendering Index | : >80 |

*There is ±%10 tolerance in the technical values.

Photometric Curve

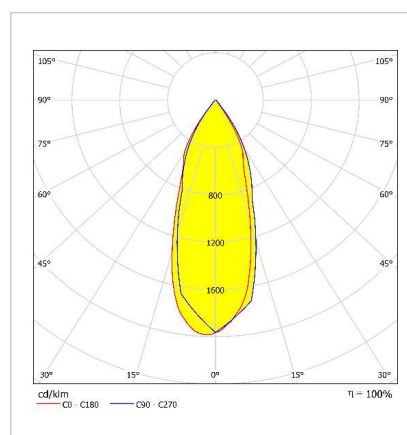

Other Features & Conditions

| | |
|-----------------------------|-----------------------------|
| Operating Temperature Range | : -5 °C / +45 °C |
| Impact Resistance | : IK02 |
| Led Life Time - L70 | : > 72,000 hours @Ta= 45 °C |


Optional Features

| | |
|-------------------------------|------------------------|
| Correlated Color Temperatures | : 2700 / 3000K / 6500K |
| DALI Option | : Yes |
| Degree Option | : 24 / 60° |

LORY IP65


Recessed Mounted 14 W Spot LED Luminaire

3203268 LRY 014A 40CM00 36 1K3 65 YV FLP

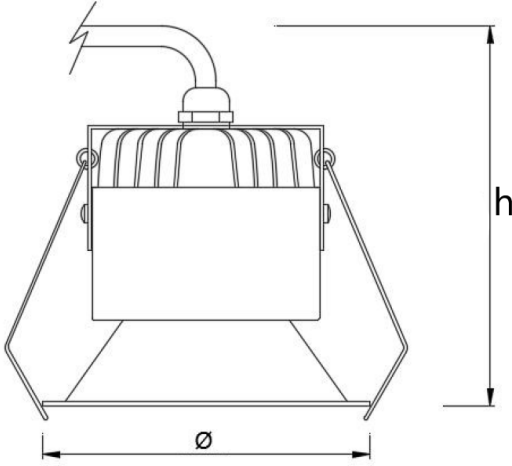


Dimensions (mm)

| | Ø | h | ØD |
|----------|----|-----|----|
| Standard | 96 | 110 | 86 |



Weight (kg)

| | |
|----------|-----|
| Standard | 0,5 |
|----------|-----|

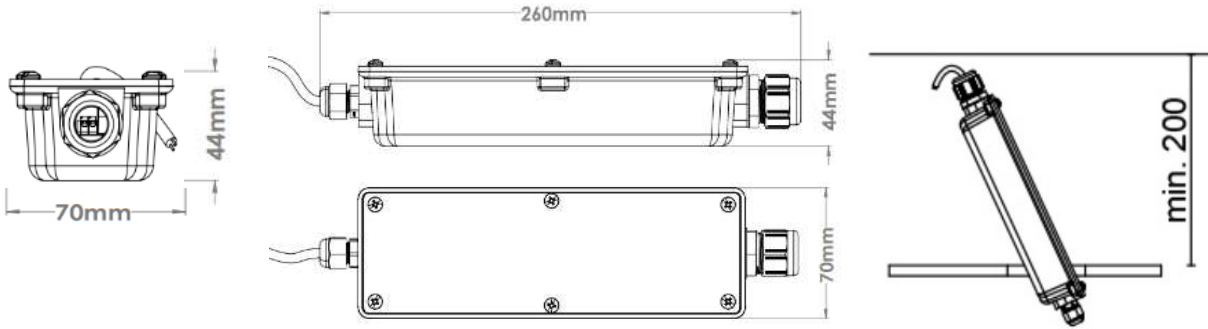

- EAE, reserves the right to make changes without prior notice.

engineering the light

EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 13.11.2020