



## LORY IP65

Recessed Mounted 8 W Spot LED Luminaire

Order Code : 3203276  
Product Code : LRY 008A 40CM00 36 732 65 YV FLP



### Product Data

#### Standard Features


Housing	: Aluminium housing
Diffuser	: 36° reflector + Glass
Ceiling Type	: Plasterboard
IP Grade	: IP65
Installation	: Recessed mounted
Light Source	: COB LED
Electronic Control	: On-Off

#### Optical & Electrical Features

Power Consumption	: 8 W
Final Luminous Flux	: 732 lm
Efficacy	: 91,5 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

\*There is ±%10 tolerance in the technical values.

### Photometric Curve

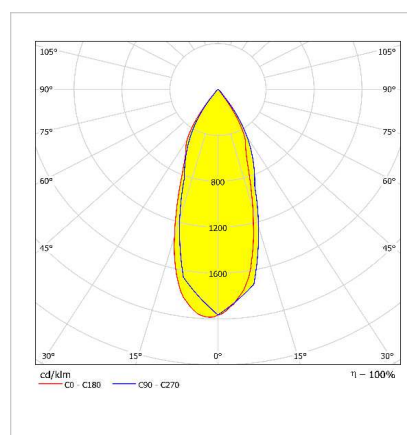

#### Other Features & Conditions

Operating Temperature Range	: -5 °C / +45 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 72,000 hours @Ta= 45 °C


#### Optional Features

Correlated Color Temperatures	: 2700 / 3000K / 6500K
DALI Option	: Yes
Degree Option	: 24 / 60°

## LORY IP65


### Recessed Mounted 8 W Spot LED Luminaire

3203276 LRY 008A 40CM00 36 732 65 YV FLP

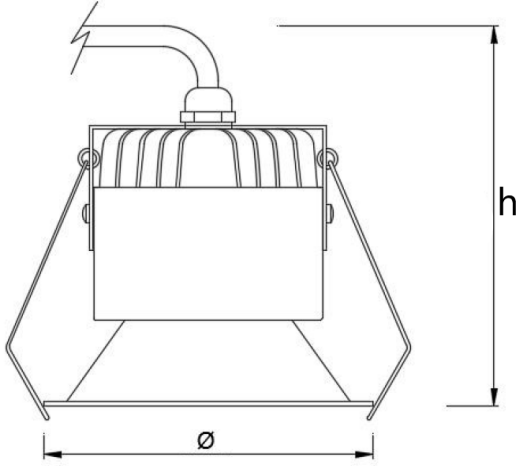


#### Dimensions (mm)

	Ø	h	ØD
Standard	96	110	86



#### Weight (kg)

Standard	0,5
----------	-----

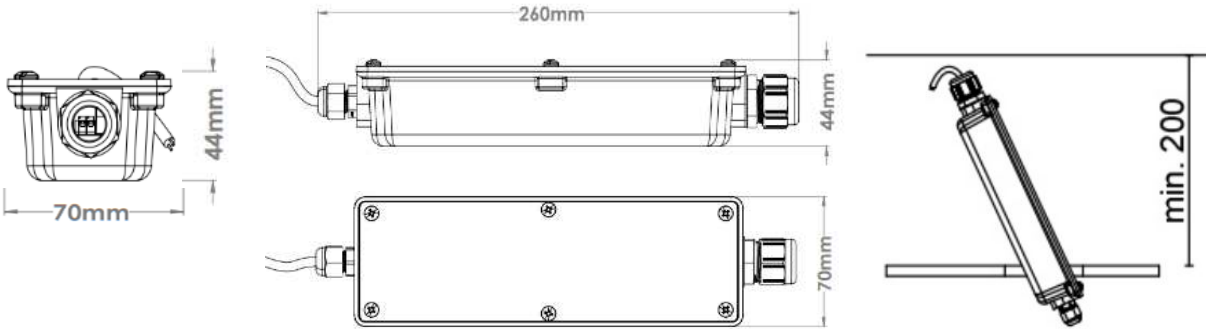

- EAE, reserves the right to make changes without prior notice.

**engineering the light**

EAE Aydınlatma A.Ş.  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY  
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
www.eaeaydinlatma.com.tr

Revision date: 13.11.2020