



## CAPELLA V.2

15 W Paysage LED Lighting Luminaire

Order Code : 3249205  
Product Code : CPL 015Z 40OD00 75X13 FLP



### Product Data

#### Standard Features

Housing	: Aluminium housing
Diffuser	: PC diffuser
IP Grade	: IP67
Installation	: Floor mounted
Light Source	: Cob LED

#### Optical & Electrical Features


Power Consumption	: 15 W
Final Luminous Flux	: 468,879lm
Efficacy	: 32,02lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos $\phi$ > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

\* There is  $\pm$  10% Tolerance in Technical Values.

#### Other Features & Conditions

Operating Temperature Range	: -5 °C/+45 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 60.000 hours @Ta= 45 °C

### Photometric Curve

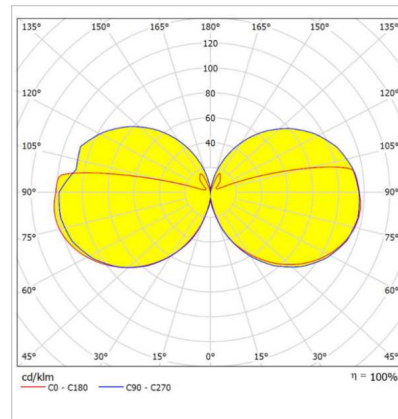

#### Optional Features

Correlated Color Temperatures : 3000K / 6500K


# CAPELLA V.2

15 W Paysage LED Lighting Luminaire

3249205 CPL 015Z 40OD00 75X13 FLP

## Dimensions (mm)

	$\emptyset$	h	h1
Standart	150	750	130

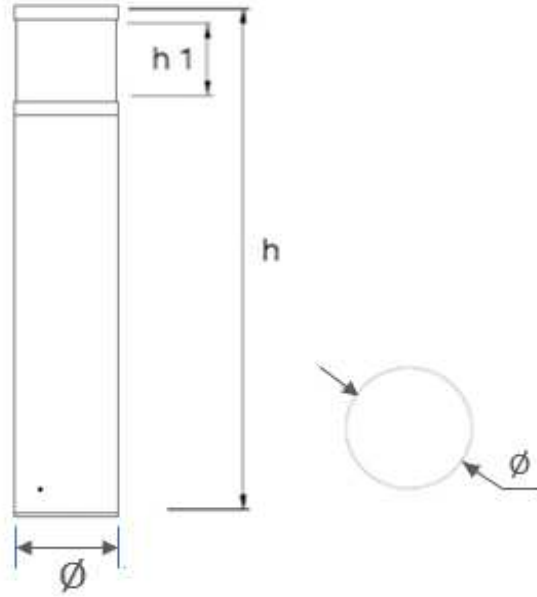

- EAE, reserves the right to make changes without prior notice.

**engineering the light**

EAE Aydınlatma A.Ş.  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY  
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
www.eaeaydinlatma.com.tr

Revision date: 08.10.2020