



LINA LENS v.2 LOWBAY

Surface Mounted 34 W Etanj LED Luminaire



Order Code : 3116669
Product Code : LNE 034U 40OD00 4K6 110PG 90 V.2

Product Data

Standard Features

Housing	: Aluminium extrusion housing
Diffuser	: Glare controlled diffuser
Optic	: 90° multi lens
IP Grade	: IP64
Installation	: Surface mounted
Light Source	: Mid Power LED


Optical & Electrical Features

Power Consumption	: 33.7 W
Final Luminous Flux	: 4672.9 lm
Efficacy	: 138.4 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 350 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Other Features & Conditions

Operating Temperature Range	: -20 °C/+40 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK 09
Led Life Time - L70	: 60.000 hours @Ta= 40 °C

Photometric Curve

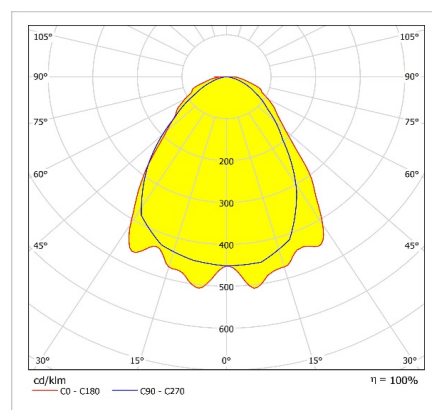



Optional Features

Correlated Color Temperatures	: 3000K, 6500K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes

LINA LENS V.2 LOWBAY

Surface Mounted 34 W Etanj LED Luminaire

3116669 LNE 034U 40OD00 4K6 110PG 90 V.2

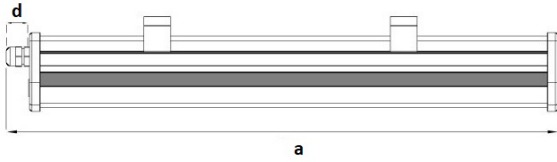

Dimension (mm)

	a	b	h	d
Standard	1197	86	92	30
With Emergency Kit (1 hr.)	1197	86	92	30
With Emergency Kit (3 hrs.)	1197	86	92	30

Weight (kg)

Standard	3,3
With Emergency Kit (1 hr.)	3,7
With Emergency Kit (3 hrs.)	4,2




PG11 30mm




Standard Cable Dimension 50cm

Suspension Set



Stainless steel
suspension set

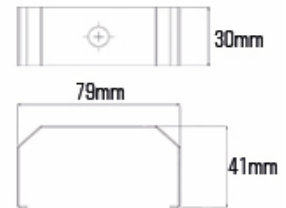

- EAE, reserves the right to make changes without prior notice.

EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 08.01.2018