



## NETALED

102 W Recessed Mounted LED Luminaire

Ordering Code : 3086372  
Product Code : NTA 102A 400D00 13K8 880 V.2 FLP



### Product Data

#### Standard Features

Housing	: RAL 9010 electrostatic powder painted aluminum housing
Diffuser	: Glare minimizing highly permeable diffuser
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Recessed mounted
Light Source	: Mid Power LED


#### Optical & Electrical Features

Power Consumption	: 102.5 W
Final Luminous Flux	: 13810.9 lm
Efficacy	: 134.6 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 2450 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

#### Other Features & Conditions

Operating Temperature Range	: -20 °C/+40 °C
Operating Temperature Range With Emergency Kit	: 0 °C/+30 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 72.000 hours @ Ta=40 °C

### Photometric Curve

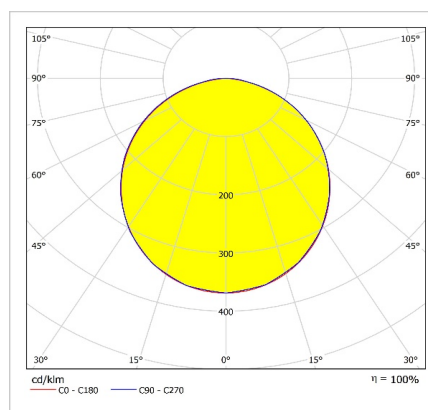


#### Optional Features

Ceiling Types	: Surface mounted and Pendant
Correlated Color Temperatures	: 3000K - 5700K
Emergency Kit Options	: 1,3 hours
Color Option	: RAL 9004

# NETALED


102 W Recessed Mounted LED Luminaire

3086372 NTA 102A 40OD00 13K8 880 V.2 FLP

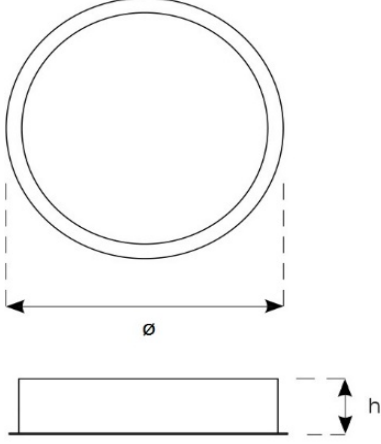

Dimensions (mm)

	Ø	h	Ø D
Recessed Mounted	891	95	877
Surface Mounted	881	95	-
Pendant	881	95	-



- EAE, reserves the right to make changes without prior notice.



Revision date: 09.08.2022