



NETALED

47 W Surface Mounted LED Luminaire

Ordering Code : 3086366
Product Code : NTA 047U 40OD00 6K3 650 V.2 FLP



Product Data

Standard Features

Housing	: RAL 9010 electrostatic powder painted aluminum housing
Diffuser	: Glare minimizing highly permeable diffuser
IP Grade	: IP20
Installation	: Surface mounted
Light Source	: Mid Power LED


Optical & Electrical Features

Power Consumption	: 47.6 W
Final Luminous Flux	: 6314.1 lm
Efficacy	: 132.4 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 1200 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Other Features & Conditions

Operating Temperature Range	: -20 °C/+40 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 72.000 hours @ Ta=40 °C

Photometric Curve

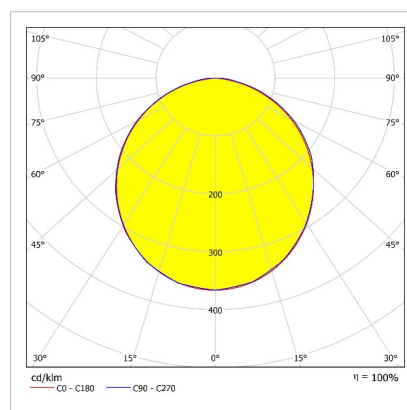

Optional Features

Ceiling Types	: Recessed mounted and Pendant
Correlated Color Temperatures	: 3000K - 5700K
Emergency Kit Options	: 1,3 hours
Color Option	: RAL 9004

NETALED

47 W Surface Mounted LED Luminaire

3086366 NTA 047U 40OD00 6K3 650 V.2 FLP



Dimensions (mm)

	Ø	h	Ø D
Surface Mounted	650	95	-

Weight (kg)

Standard	5,5
----------	-----



- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TÜRKİYE **Phone:** +90 212 413 21 00 (pbx) **Fax:** +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date:09.03.2022