



NETALED

17 W Recessed Mounted LED Luminaire

Ordering Code : 3086345
Product Code : NTA 016A 40OD00 1K7 350 V.2 FLP



Product Data

Standard Features

Housing	: RAL 9010 electrostatic powder painted aluminum housing
Diffuser	: Glare minimizing highly permeable diffuser
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Recessed mounted
Light Source	: Mid Power LED


Optical & Electrical Features

Power Consumption	: 15.6 W
Final Luminous Flux	: 1728.5 lm
Efficacy	: 110.2 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 500 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Other Features & Conditions

Operating Temperature Range	: -20 °C/+40 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 72.000 hours @ Ta=40 °C

Photometric Curve

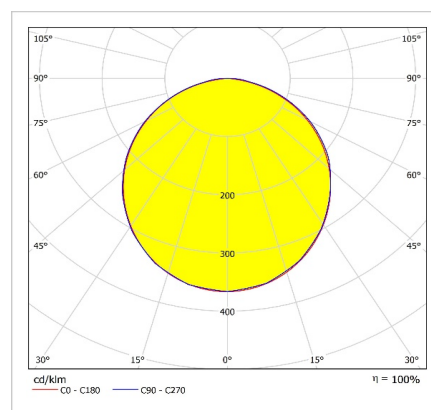


Optional Features

Ceiling Types	: Surface mounted and Pendant
Correlated Color Temperatures	: 3000K - 5700K
Color Option	: RAL 9004

NETALED


17 W Recessed Mounted LED Luminaire

3086345 NTA 016A 40OD00 1K7 350 V.2 FLP

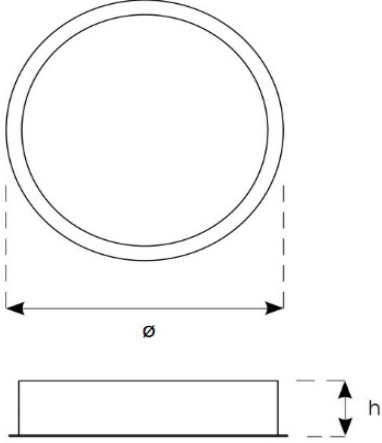

Dimensions (mm)

	Ø	h	Ø D
Recessed Mounted	362	95	348
Surface Mounted	350	95	-
Pendant	350	95	-



- EAE, reserves the right to make changes without prior notice.

EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 23.05.2019