



## NETALED

129 W Surface Mounted LED Luminaire

Ordering Code : 3086384  
Product Code : NTA 129U 40OD00 18K5 1200 V.2 FLP



### Product Data

#### Standard Features

Housing	: RAL 9010 electrostatic powder painted aluminum housing
Diffuser	: Glare minimizing highly permeable diffuser
IP Grade	: IP20
Installation	: Surface mounted
Light Source	: Mid Power LED


#### Optical & Electrical Features

Power Consumption	: 129.3 W
Final Luminous Flux	: 18488 lm
Efficacy	: 142.9 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 2600 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

#### Other Features & Conditions

Operating Temperature Range	: -20 °C/+40 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 72.000 hours @ Ta=40 °C

### Photometric Curve

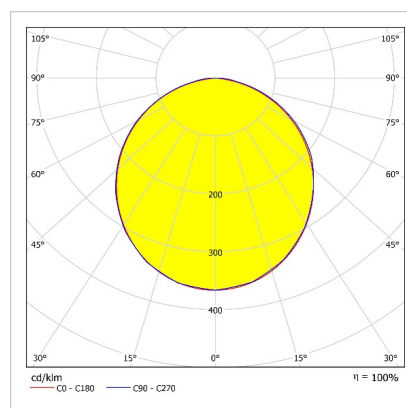

#### Optional Features

Ceiling Types	: Recessed mounted and Pendant
Correlated Color Temperatures	: 3000K - 5700K
Emergency Kit Options	: 1,3 hours
Color Option	: RAL 9004

# NETALED

129 W Surface Mounted LED Luminaire

3086384 NTA 129U 40OD00 18K5 1200 V.2 FLP



## Dimensions (mm)

	Ø	h	Ø D
Surface Mounted	1200	95	-

## Weight (kg)

Standard	14
----------	----



- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TÜRKİYE Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
www.eaeaydinlatma.com.tr

Revision date:09.03.2022