



## KANOLED v.3

46 W Gas Stations LED Lighting Luminaires

Order Code : 3177130  
Product Code : KNP 046A 40CM00 WL 6K60 V.3



### Product Data

#### Standard Features

Housing	: Aluminium injection housing
Diffuser	: Transparent glass
Optic	: Wide angle lens
IP Grade	: IP66
Installation	: Under the canopy
Light Source	: Power LED


#### Optical & Electrical Features

Power Consumption	: 45.8 W
Final Luminous Flux	: 6638.4 lm
Efficacy	: 144.9 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 4 kV
Drive Current	: 1450 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

#### Other Features & Conditions

Operating Temperature Range	: -20 °C/ +50 °C
Impact Resistance	: IK07
Led Life Time - L70	: > 60.000 hours @Ta= 50 °C

### Photometric Curve

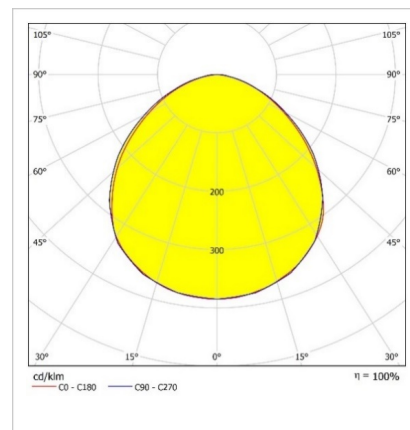


#### Optional Features

Correlated Color Temperatures	: 5700 K
Diffuser Type	: Sanded glass

## KANOLED V.3

46 W Gas Stations LED Lighting Luminaires

3177130 KNP 046A 40CM00 WL 6K60 V.3

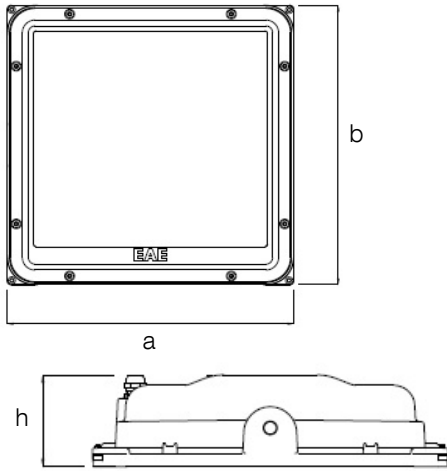

### Dimensions (mm)



	a	b	h
Standard	336	336	88

### Weight (kg)

Standard	6,5
----------	-----





### Accessories

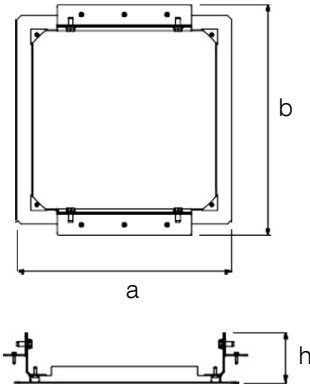

Metal Suspending Ceiling Mounting Set

Ordering Code : 3115524

a	b	h
420	420	92,5



Covering Flange

Ordering Code : 3058683

a	b
620	620

- EAE, reserves the right to make changes without prior notice.



Revizyon tarihi: 09.09.2019