



PB2 PB V.2

40 W Urban LED Lighting Luminaire



Order Code : 3248340
Product Code : PB2 040U 40FS00 3A 4K0 PB V2 FLP

Product Data

Standard Features

Housing	Made of aluminum polyester powder coated with different finishes and different ral colors, silicone gasket
Diffuser	Tempered Glass diffuser
IP Grade	IP65
Installation	Pole mounted
Light Source	Mid Power LED

Optical & Electrical Features


Power Consumption	40 W
Final Luminous Flux	4050 lm
Efficacy	101.2 lm/W
Input Voltage	220-240 V AC
Frequency	50-60 Hz
Power Factor	> 0,9
Surge Transient Protection	2-6 kV
Correlated Color Temperature	4000K
Color Rendering Index	>80

*There is $\pm 10\%$ tolerance in the technical values.

Other Features & Conditions

Operating Temperature Range	-25 °C/+55 °C
Impact Resistance	IK07
Led Life Time - L70	> 55.000 hours @Ta= 55 °C

Photometric Curve

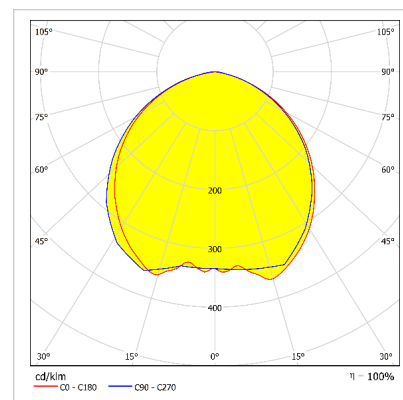



Optional Features

Correlated Color Temperatures	3000K, 6500K
Electronic Control	1-10 V Dimko , Dali

PB2 PB V.2

40 W Urban LED Lighting Luminaire

3248340 PB2 040U 40FS00 3A 4K0 PB V2 FLP

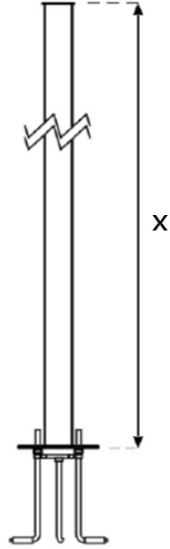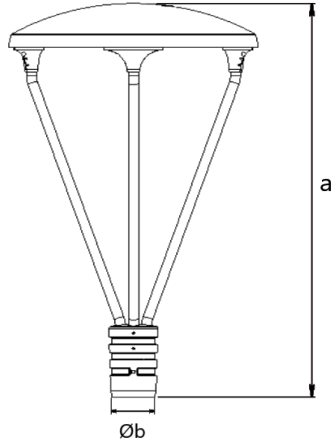

Dimension (mm)


	Ø	a	Øb	x
Standard	470	757	Ø76	3000x4000

Weight (kg)

Standard	10,8
----------	------

Pole Order Table

Order Code	Descriptions	Product Codes
1019004	PB2 PB CAP76 3 MT	CMN PB CAP76 3M DIREK
1019006	PB2 PB CAP76 4 MT	CMN PB CAP76 4M DIREK

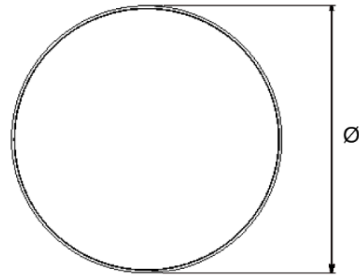

- EAE, reserves the right to make changes without prior notice.



Revision date: 27.12.2021