



PROLIT-M PR v.2

43 W Front and Area LED Lighting Luminaire

Order Code : 3113609
Product Code : PRM 043D 57CM00 065 5K63 PR V2



Product Data

Standard Features

| | |
|--------------|-------------------------------|
| Housing | : Aluminium injection housing |
| Diffuser | : Tempered glass |
| Optic | : 65° lens |
| IP Grade | : IP66 |
| Installation | : Floor Mounted |
| Light Source | : Power LED |


Optical & Electrical Features

| | |
|------------------------------|----------------|
| Power Consumption | : 42.2 W |
| Final Luminous Flux | : 5639.2 lm |
| Efficacy | : 133.4 lm/W |
| Input Voltage | : 220-240 V AC |
| Frequency | : 50-60 Hz |
| Power Factor | : > 0,9 |
| Surge Transient Protection | : 3.5 kV |
| Drive Current | : 1050 mA |
| Correlated Color Temperature | : 5700K |
| Color Rendering Index | : >70 |

Other Features & Conditions

| | |
|-----------------------------|-----------------------------|
| Operating Temperature Range | : -25 °C/+50 °C |
| Impact Resistance | : IK09 |
| Led Life Time - L70 | : > 60.500 hours @Ta= 50 °C |

Photometric Curve

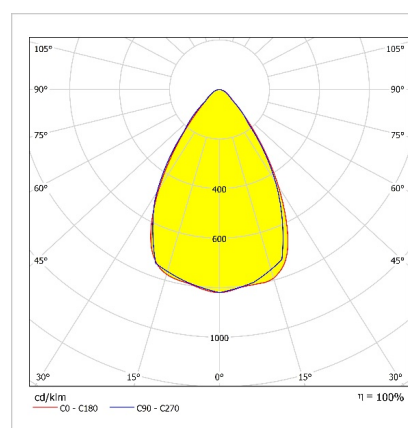


Optional Features

| | |
|-------------------------------|------------------------------|
| Correlated Color Temperatures | : 3000K, 4000K, 5000K, 6500K |
| Dali | : Yes |

PROLIT-M PR v.2

43 W Front and Area LED Lighting Luminaire

3113609 PRIM 043D 57CM00 065 5K63 PR V2

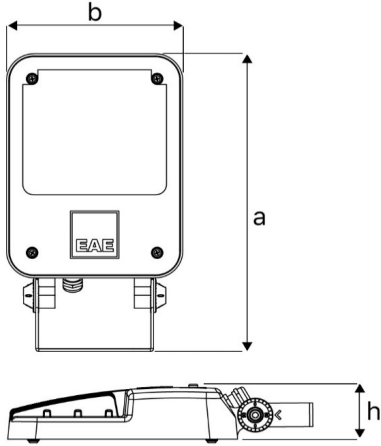


Dimensions (mm)

| | a | b | h |
|----------|-----|-----|----|
| Standard | 342 | 191 | 68 |

Weight (kg)

| | |
|----------|-----|
| Standard | 2,1 |
| Dali | 2,9 |

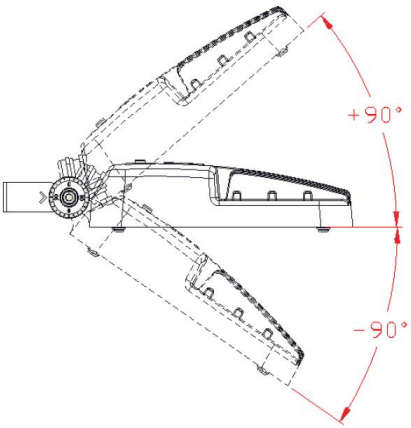

- EAE, reserves the right to make changes without prior notice.



Revision date: 12.09.2018