



# PROLIT-M PR V.2

30 W Front and Area LED Lighting Luminaire

Order Code : 3114190  
Product Code : PRM 030D 57CM00 WL 3K81 PR V2



## Product Data

### Standard Features

Housing	: Aluminium injection housing
Diffuser	: Tempered glass
Optic	: Wide angle lens
IP Grade	: IP66
Installation	: Floor Mounted
Light Source	: Power LED


### Optical & Electrical Features

Power Consumption	: 29.4 W
Final Luminous Flux	: 3810 lm
Efficacy	: 129.3 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 3.5 kV
Drive Current	: 700 mA
Correlated Color Temperature	: 5700K
Color Rendering Index	: >70

### Other Features & Conditions

Operating Temperature Range	: -25 °C/+50 °C
Impact Resistance	: IK09
Led Life Time - L70	: > 60.500 hours @Ta= 50 °C

## Photometric Curve

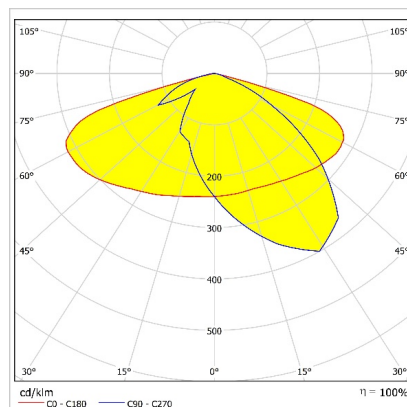


### Optional Features

Correlated Color Temperatures	: 3000K, 4000K, 5000K, 6500K
Dali	: Yes

## PROLIT-M PR v.2

30 W Front and Area LED Lighting Luminaire

3114190 PRM 030D 57CM00 WL 3K81 PR V2

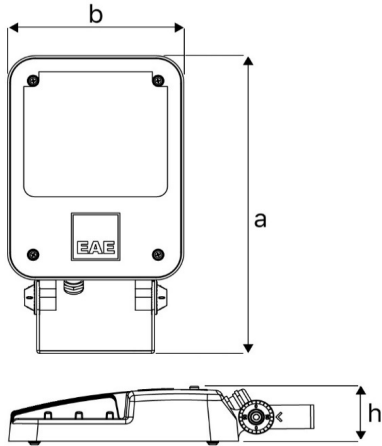


### Dimensions (mm)

	a	b	h
Standard	342	191	68

### Weight (kg)

Standard	2,1
Dali	2,9

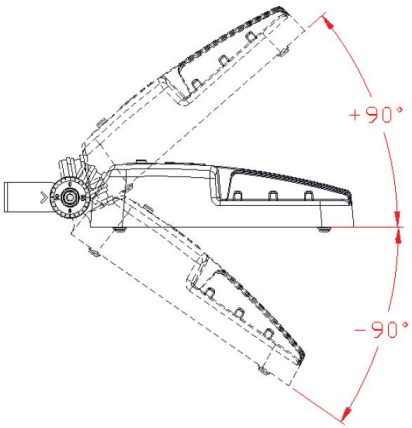

- EAE, reserves the right to make changes without prior notice.



Revision date: 12.09.2018