



# PROLIT-M PR v.2

60 W Front and Area LED Lighting Luminaire

Order Code : 3113659  
Product Code : PRM 060D 57CM00 AS 6K59 PR V2



## Product Data


### Standard Features

Housing	: Aluminium injection housing
Diffuser	: Tempered glass
Optic	: Asymmetric lens
IP Grade	: IP66
Installation	: Floor Mounted
Light Source	: Power LED

### Optical & Electrical Features

Power Consumption	: 59.8 W
Final Luminous Flux	: 6592 lm
Efficacy	: 110.1 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 3.5 kV
Drive Current	: 1050 mA
Correlated Color Temperature	: 5700K
Color Rendering Index	: >70

## Photometric Curve

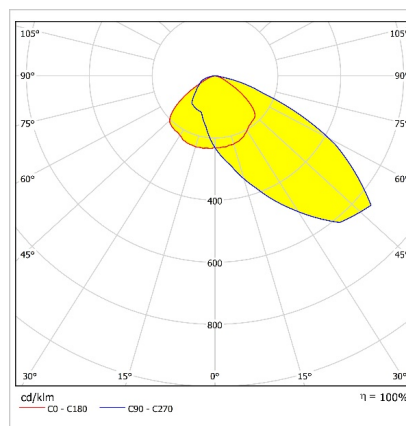

### Other Features & Conditions

Operating Temperature Range	: -25 °C/+50 °C
Impact Resistance	: IK09
Led Life Time - L70	: > 60.500 hours @Ta= 50 °C


### Optional Features

Correlated Color Temperatures	: 3000K,4000K,5000K,6500K
Dali	: Yes

## PROLIT-M PR v.2

60 W Front and Area LED Lighting Luminaire

3113659 PRM 060D 57CM00 AS 6K59 PR V2

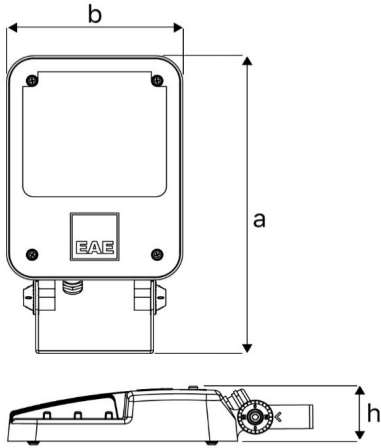


### Dimensions (mm)

	a	b	h
Standard	342	191	68

### Weight (kg)

Standard	2,8
Dali	2,9

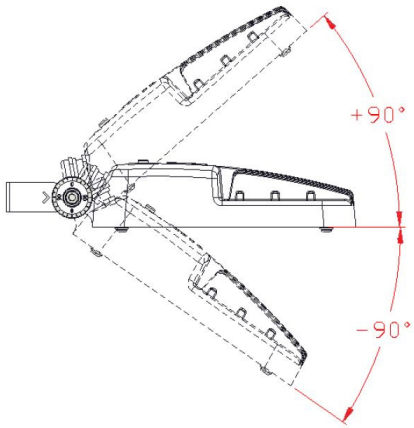

- EAE, reserves the right to make changes without prior notice.



Revision date: 12.09.2018