



TORNADO

Surface Mounted 52 W Etanj LED Luminaire

Order Code : 3287077
Product Code : TRD 052U 40OD00 7K37 150 66 ELP



Product Data

Standard Features


| | |
|--------------------|--|
| Housing | : Grey PC (high mechanical resistance, UV stability) |
| Diffuser | : Translucent PC with nanooptics (high mechanical resistance, UV stability) |
| IP Grade | : IP66 |
| Installation | : Surface mounted |
| Light Source | : Mid Power LED |
| Electronic Control | : On/Off |

Optical & Electrical Features

| | |
|------------------------------|----------------|
| Power Consumption | : 51,9 W |
| Final Luminous Flux | : 7377 lm |
| Efficacy | : 142 lm/W |
| Input Voltage | : 220-240 V AC |
| Frequency | : 50-60 Hz |
| Power Factor | : > 0,9 |
| Correlated Color Temperature | : 4000K |
| Color Rendering Index | : >80 |

* There is $\pm 10\%$ tolerance in Technical Values

Photometric Curve

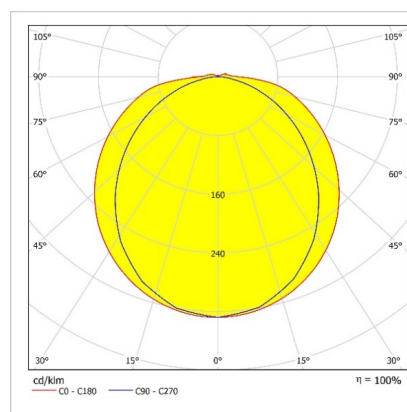

Other Features & Conditions

| | |
|-----------------------------|------------------------------|
| Operating Temperature Range | : -20 °C/+35 °C |
| Impact Resistance | : IK08 |
| Led Life Time - L70 | : > 102.000 hours @Ta= 35 °C |

Optional Features

| | |
|-------------------------------|------------------------|
| Correlated Color Temperatures | : 3000K, 5000K , 6500K |
| Emergency Kit Options | : 1, 3 hours |



TORNADO

Surface Mounted 52 W Etanj LED Luminaire



3287077 TRD 052U 40OD00 7K37 150 66 ELP

Dimension (mm)

| | a | b | h | d |
|----------|------|----|----|----------|
| Standard | 1455 | 98 | 84 | 970-1230 |

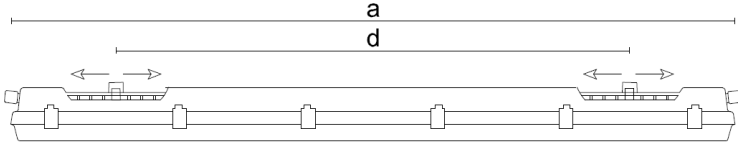

1064641: TRD ASKI TAKIM KANCASI

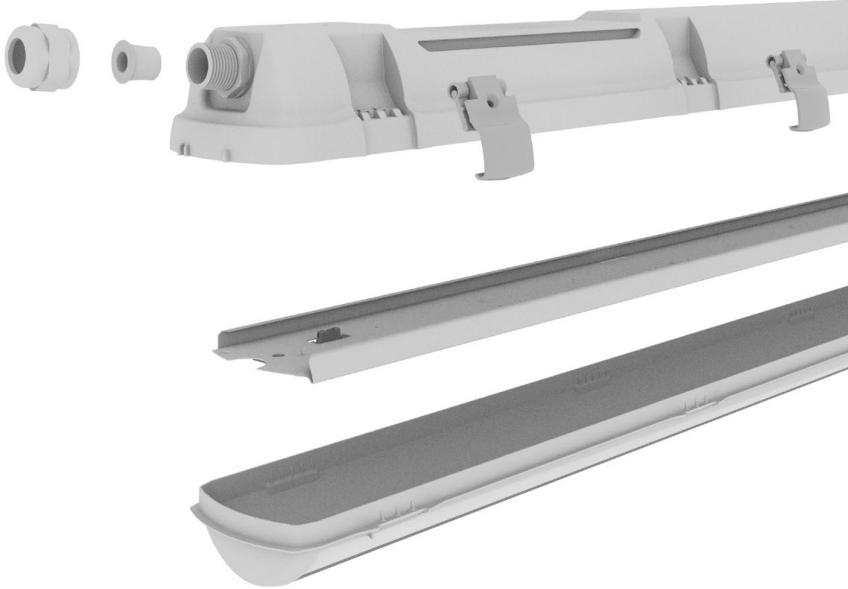

• EAE, reserves the right to make changes without prior notice.

engineering the light

EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 25.07.2023