



## GALIS EXPROOF

55 W Exproof LED Lighting Fixture  
Group II, Category 3, (Zone 2 / 21)



Order Code : 3280396  
Product Code : GLS 055U 40EX00 7K71 150 Z2.21

### Product Data

#### Exproof Product Features

Area	: Zone 2 / 21
Group/Category	: 3G / 2D
Protection Class	: nR / tb
Explosion Group	: IIC / IIIC
Maximum Surface Temperature Class	: T6 / T85°C
Certificate Code	: EX II 3G Ex nR op IIC T6 Gc EX II 2D Ex tb op IIIC T85°C Db

#### Standard Features

Housing	: Aluminium extrusion housing
Diffuser	: Transparent glass
IP Grade	: IP66
Installation	: Surface mounted
Light Source	: Mid Power LED
Electronic Control	: On-Off

#### Optical & Electrical Features


Power Consumption	: 51.5 W
Final Luminous Flux	: 7580.6 lm
Efficacy	: 147.4 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 350 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80
Photobiological Risk Group	: RG1

\* There is  $\pm 10\%$  Tolerance in Technical Values.

#### Other Features & Conditions

Operating Temperature Range	: -25 °C/+40 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK09
Led Life Time - L70	: > 72.000 hours @Ta= 40 °C

### Photometric Curve

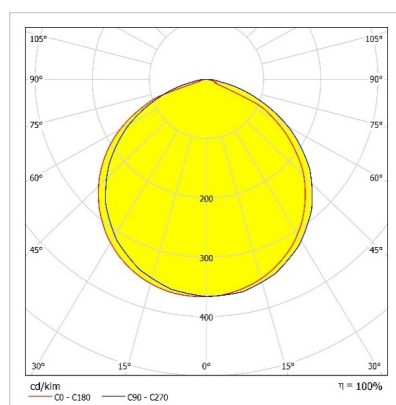

#### Optional Features


Correlated Color Temperatures	: 3000K, 6500K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes

# GALIS EXPROOF


55 W Exproof LED Lighting Fixture  
Group II, Category 3, (Zone 2 / 21)

3280396 GLS 055U 40EX00 7K71 150 Z2.21

## Standard



## Through Wiring




## Dimension (mm)

	a	b	h
Standard	1528	76	71
1 - 3 hours ACK*	1528	76	71
Through Wiring	1557	76	71
Through Wiring ACK*	1557	76	71


## Weight (kg)

Standard	5
1 - 3 hours ACK*	5,4
Through Wiring	5,1
Through Wiring ACK*	5,5

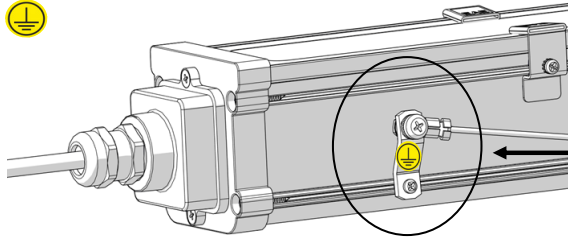

Gövdenin dışarıdan topraklanabilmesi için dizayn edilmiş bölümdür. / It is the section designed for the body to be grounded from the outside.


## Reading Label Information

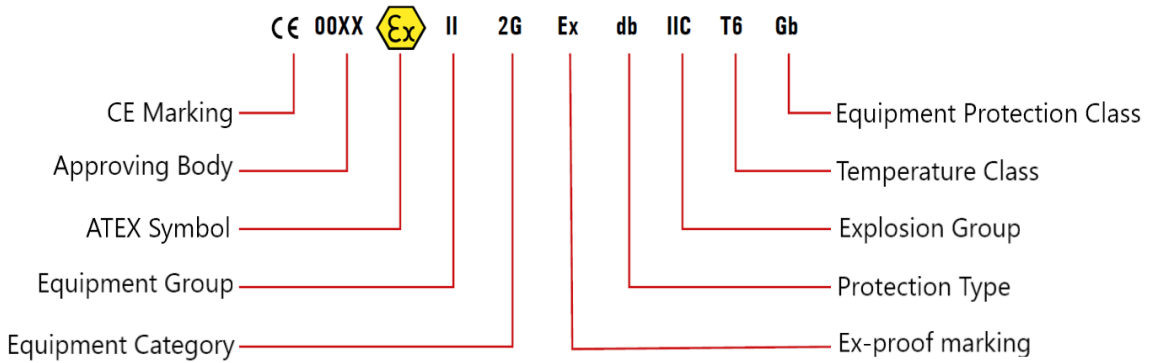

## GALIS EXPROOF


55 W Exproof LED Lighting Fixture  
Group II, Category 3, (Zone 2 / 21)

3280396 GLS 055U 40EX00 7K71 150 Z2.21

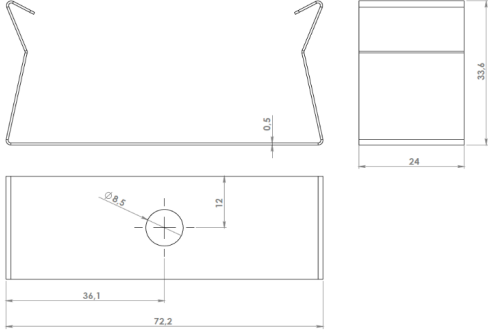


Order Code : 1006876

Product Code : FASTENING SPRING

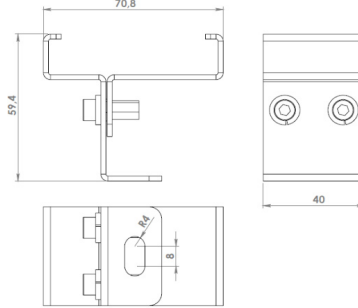


Order Code: 3164773

Product Code : GALIS FIXED HANGER KIT

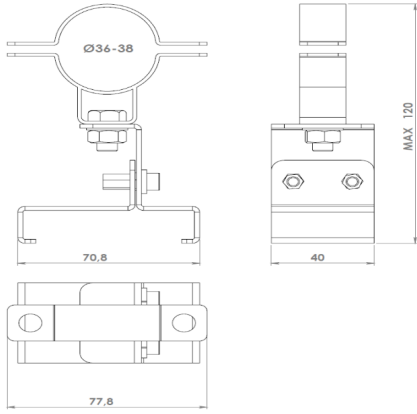


Order Code : 3290438

Product Code : GALIS FIXED PIPE HANGING KIT (Ø31-Ø38)

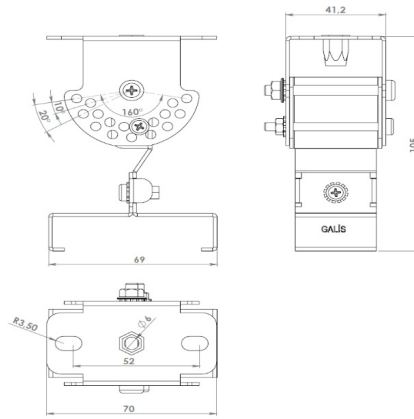

Order Code: 3236243

Product Code : GALIS ADJUSTABLE HANGER KIT



Order Code : 3290008

Product Code : GALIS BOX PROFILE hanger set

- EAE, reserves the right to make changes without prior notice.