



## OCTO V.2

20W LED Three-Phase Ray Spot Luminaire

Order Code : 3263768  
Product Code : OCT 020F 40CM00 30 2K0 80 V.2 FLP

### Product Data

#### Standard Features

Housing	: Aluminum injection housing, movable arm
Diffuser	: 30° reflector and glass
IP Grade	: IP 20
Installation	: Three-Phase Ray
Light Source	: COB LED
Electronic Control	: On/Off

#### Optical & Electrical Features

Power Consumption	: 20 W
Final Luminous Flux	: 2059.3 lm
Efficacy	: 100.87 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

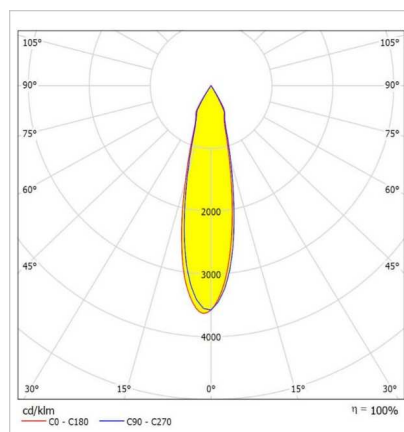
\* There is ± 10% Tolerance in Technical Values.

#### Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Impact Resistance	: IK 02
Led Life Time - L70	: 60.000 saat @Ta= 35 °C



### Photometric Curve




#### Optional Features

Correlated Color Temperatures	: 3000K, 6500K
Emergency Kit Options	: No
DALI Option	: Yes
Degree Option	: 15° / 45°

# OCTO V.2

20W LED Three-Phase Ray Spot Luminaire

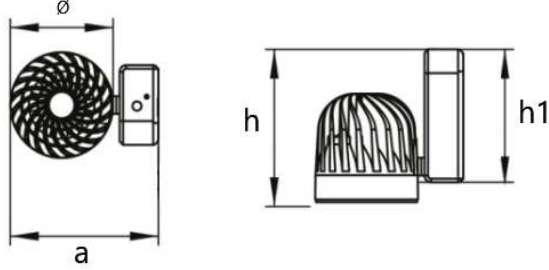3263768 OCT 020F 40CM00 30 2K0 80 V.2 FLP



## Dimensions (mm)


	Ø	a	h	h1
Three-Phase Ray	100	140	150	130

## Weight (kg)

Three-Phase Ray	1,8
-----------------	-----




## Rail Installation



1 - 2


Key rail socket is inserted to  
Three-phase - Single-phase Rail  
in an oblique manner.



3 - 4

Locking catch on key rail socket is  
turned as shown, then assembly  
process is complete.

- EAE, reserves the right to make changes without prior notice.












EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) Fax: +90 212 413 21 01

www.eaeaydinlatma.com.tr

Revision date: 04.03.2021

## ELECTROTRACK Ordering Table

Ordering Code	Descriptions	Product Codes	
3061351	1m SURFACE MOUNTED, GREY	TRIFAZE RAY 1MT.GRI.S.UST	
3061352	1m SURFACE MOUNTED, BLACK	TRIFAZE RAY 1MT.SIYAH.S.U	
3061350	1m SURFACE MOUNTED, WHITE	TRIFAZE RAY 1MT.BEYAZ.S.U	
3061356	2m SURFACE MOUNTED, BLACK	TRIFAZE RAY 2MT.SIYAH.S.U	
3061354	2m SURFACE MOUNTED, WHITE	TRIFAZE RAY 2MT.BEYAZ.S.U	
3061360	3m SURFACE MOUNTED, BLACK	TRIFAZE RAY 3MT.SIYAH.S.U	
3061359	3m SURFACE MOUNTED, WHITE	TRIFAZE RAY 3MT.BEYAZ.S.U	
3056387	1m RECESSED MOUNTED, WHITE	3FAZ.1M.S.ALT TRI.RAY BEY	
3056391	2m RECESSED MOUNTED, GREY	3FAZ.2M.S.ALT TRI.RAY GRI	
3056390	2m RECESSED MOUNTED, WHITE	3FAZ.2M.S.ALT TRI.RAY BEY	
3056393	3m RECESSED MOUNTED, WHITE	3FAZ.3M.S.ALT TRI.RAY BEY	
3081749	THREE-PHASE RAY SOCKET, GREY TRIFAZE RAY SOKETİ GRI		
3062139	THREE-PHASE RAY SOCKET, BLACK TRIFAZE RAY SOKETİ SIYAH		
3081748	THREE-PHASE RAY SOCKET, WHITE TRIFAZE RAY SOKETİ BEYAZ		
3056466	THREE-PHASE ENERGY INPUT, GRI ENERJİ GIRIŞ ADAPTOR GRI		
3056465	THREE-PHASE ENERGY INPUT, BLACK ENERJİ GIRIŞ ADAPTOR SIYAH		
3056464	THREE-PHASE ENERGY INPUT, WHITE ENERJİ GIRIŞ ADAPTOR BEYAZ		
3056282	3 PHASE LONG INTERTIE CONNecT 3 FAZ ARA BAĞL.N.UZUN.SIYAH		
3056281	3 PHASE LONG INTERTIE CONNecT 3 FAZ ARA BAĞL.N.UZUN.BEYAZ		
3056410	3 PHASE INTERTIE CONNECTION, BLACK ARA BAĞLANTI ELEMANI SIYAH		
3056408	3 PHASE INTERTIE CONNECTION, WHITE ARA BAĞLANTI ELEMANI BEYAZ		
3056491	3 PHASE L CONNECTION, BLACK L 3 FAZ BAG. PARCASI SIYAH		
3056489	3 PHASE L CONNECTION, WHITE L 3 FAZ BAG. PARCASI BEYAZ		
3061346	3 PHASE T CONNECTION, WHITE T BAĞLANTI PARCASI BEYAZ		
3056284	3 PHASE ENDING COVER, GREY 3 FAZLI KAPAK SONLAND.GRI		
3056285	3 PHASE ENDING COVER, BLACK 3 FAZLI KAPAK SONLAND.SIYAH		
3056283	3 PHASE ENDING COVER, WHITE 3 FAZLI KAPAK SONLAND.BEYAZ		
3056386	3 PHASE RAY CEILING CARRIER , 3 FAZLI RAY TAVAN TASIYICI		