



## KRIZA 3X

Recessed Mounted 60 W Spot LED Luminaire

Order Code : 3236301  
Product Code : KRZ 060A 40SD00 24 7K3 3X V.2 FLP



### Product Data

#### Standard Features


Housing	: Aluminium Injection Housing
Optic	: 24° Reflector
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Recessed Mounted
Light Source	: COB LED
Electronic Control	: On/Off

#### Optical & Electrical Features

Power Consumption	: 60 W
Final Luminous Flux	: 7260 lm
Efficacy	: 121 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos $\phi$ > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

\* There is  $\pm$  10% Tolerance in Technical Values.

### Photometric Curve

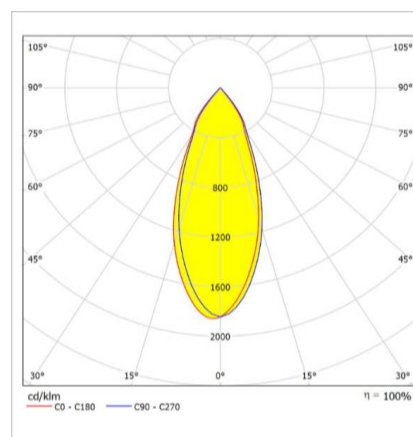

#### Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Operating Temperature Range With Emergency Kit	: +5 °C / +35 °C
Impact Resistance	: IK03
Led Life Time - L70	: 72.000 hours @Ta= 35 °C

#### Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 6500K
Emergency Kit Options	: 1 / 3 hours
DALI Option	: Yes
Degree Option	: 40° / 60°



# KRIZA 3X

Recessed Mounted 60 W Spot LED Luminaire

3236301 KRZ 060A 40SD00 24 7K3 3X V.2 FLP


## Dimensions (mm)

	a	b	h	d1 X d2
Standard	155	410	120	390 x 140

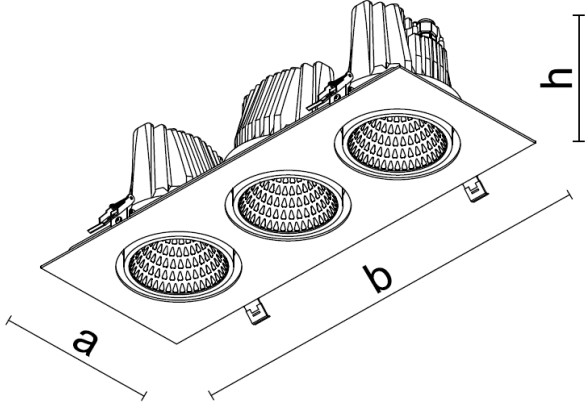

## Weight (kg)

Standart	4.050
----------	-------

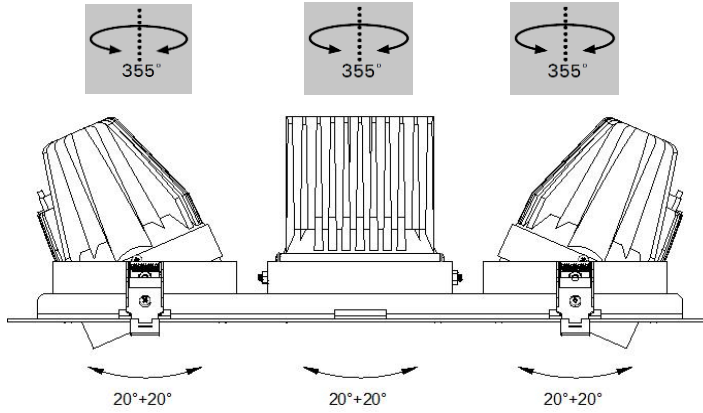

- EAE, reserves the right to make changes without prior notice.

**engineering the light**

EAE Aydınlatma A.Ş.  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL -TURKEY  
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
www.eaeaydinlatma.com.tr

Revision date: 16.06.2023