



PLANO 2X

Recessed Mounted 16 W Spot
LED Luminaire

Order Code : 3268022
Product Code : PLN 016A 40CM00 30 LLL 2X MN 20 FLP



Product Data

Standard Features


Housing	: Aluminum injection head
Optic / Diffuser	: 30° Reflector / Transparent diffuser
Ceiling Type	: Plasterboard
IP Grade	: IP 20
Installation	: Recessed mounted
Light Source	: COB LED
Electronic Control	: On/Off

Optical & Electrical Features

Power Consumption	: 16 W
Final Luminous Flux	: 1576,32 lm
Efficacy	: 98,52 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

* There is $\pm 10\%$ Tolerance in Technical Values.

Photometric Curve

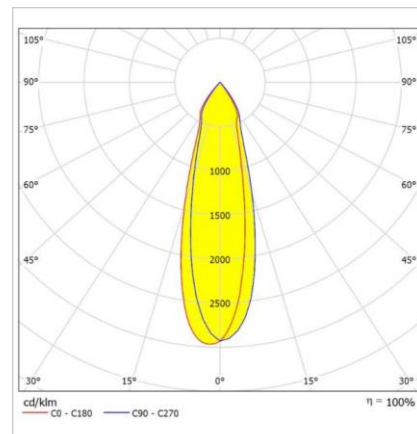

Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Operating Temperature Range With Emergency Kit	: +5 °C / +35 °C
Impact Resistance	: IK03
Led Life Time - L70	: 72.000 saat @Ta= 35 °C

Optional Features

Correlated Color Temperatures	: 3000K / 6500K
Emergency Kit Options	: 1 / 3 hours
DALI Option	: Yes
Degree Option	: 15°




PLANO 2X

Recessed Mounted 16 W Spot LED Luminaire

3268022 PLN 016A 40CM00 30 LLL 2X MN 20 FLP

Dimensions (mm)

	a	b	h	d ¹ ,d ²
Standart	190	110	80	175 x 95

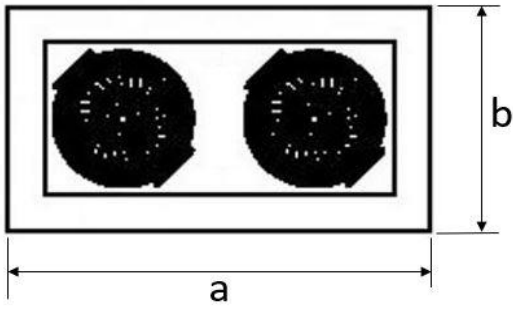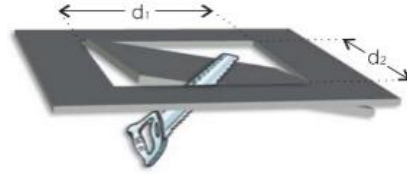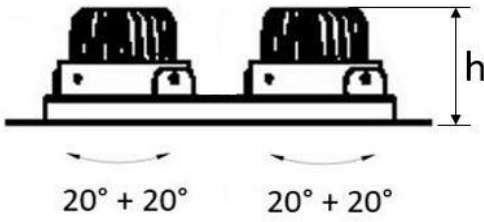

Weight (kg)

Standard	0,85
----------	------

- EAE, reserves the right to make changes without prior notice.

engineering the light

EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 09.08.2022