



## DOWNLED IP20 Surface Mounted 5" V.2

18 W Spot LED Lighting Luminaire

Order Code : 3269688  
Product Code : DWL 018U 40OD00 1K4 20 05 V.2 FLP



### Product Data

#### Standard Features

Housing	: Aluminium Housing
Optic	: Recessed Opal Diffuser
IP Grade (Housing)	: IP40
Installation	: Surface Mounted
Light Source	: SMD LED
Electronic Control	: On-Off (IP20 Driver)


#### Optical & Electrical Features

Power Consumption	: 18 W
Final Luminous Flux	: 1526,4 lm
Efficacy	: 84.8 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

#### Other Features & Conditions

Operating Temperature Range	: -5°C / +35°C
Impact Resistance	: IK03
LED Life Time - L70	: > 72.000 hours @Ta= 35 °C

### Photometric Curve

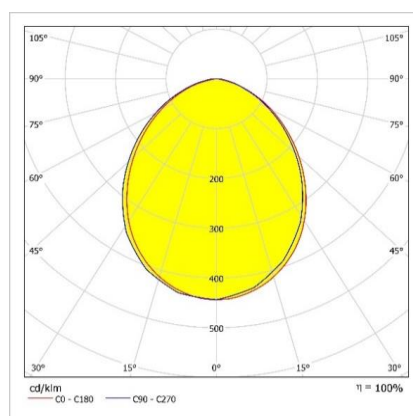

#### Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 6500K
Emergency Kit Options	: No
DALI Option	: Yes


## DOWNLED IP20 Surface Mounted 5" V.2

18 W Spot LED Lighting Luminaire

3269688 DWL 018U 40OD00 1K4 20 05 V.2 FLP

### Dimensions (mm)

	Ø	h
Surface Mounted	160	150

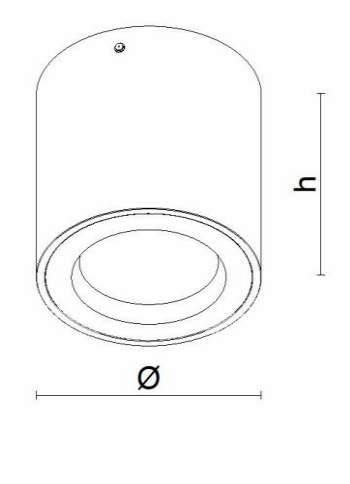

### Weight (kg)

Standard



- EAE, reserves the right to make changes without prior notice.

**engineering the light**

EAE Aydınlatma A.Ş.  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL -TURKEY  
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
[www.eaeaydinlatma.com.tr](http://www.eaeaydinlatma.com.tr)

Revision date: 23.08.2023