



EXIT TAOLA-KR

2 W Emergency Lighting LED Luminaire

Order Code : 3235816
Product Code : EXT 002U 65LN02 150 20 TAO STD KR FLP



Product Data

Standard Features

Housing	: White polycarbonate housing
IP Grade	: IP20
Installation	: Surface mounted
Light Source	: Power LED
Emergency Kit Options	: 1 - 3 hours
Run Mode	: Non maintained

Optical & Electrical Features


Power Consumption	: 2 W
Final Luminous Flux	: 136 lm
Efficacy	: 68 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: $\cos \phi > 0,9$
Correlated Color Temperature	: 6500K
Color Rendering Index	: >80

* There is $\pm 10\%$ Tolerance in Technical Values.

Other Features & Conditions

Operating Temperature Range With Emergency Kit	: $+10\text{ }^{\circ}\text{C}/+35\text{ }^{\circ}\text{C}$
Impact Resistance	: IK02
Led Life Time - L70	: > 50.000 hours @ $T_a = 35\text{ }^{\circ}\text{C}$

Photometric Curve

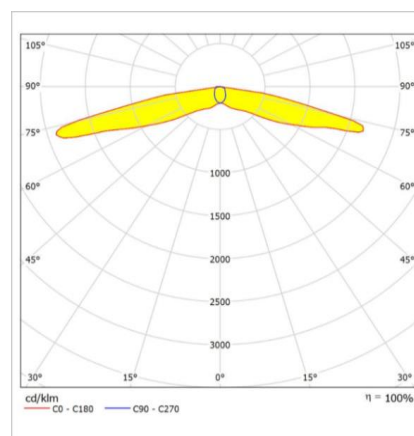


Optional Features

Electronic Control : Self/Test, DALI

EXIT TAOLA-KR

2 W Emergency Lighting LED Luminaire

3235816 EXT 002U 65LN02 150 20 TAO STD KR FLP

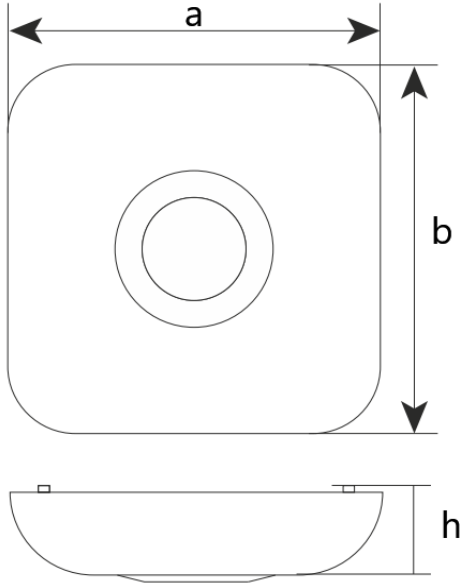

Dimensions (mm)

	a	b	h
Standard	160	160	40

Weight (gr)

Standard	305
----------	-----



- The device needs to be charged and discharged for 48 hours twice. After the third 48-hour charge, it will run for 3 hours.
- EAE, reserves the right to make changes without prior notice.

engineering the light

EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 18.03.2024