



## SQUARE

Recessed Mounted 8 W Spot LED Luminaire

Order Code : 3216603  
Product Code : SQR 008A 40SD00 36 0K8 9090 KR FL FLP



### Product Data

#### Standard Features


Housing	: Aluminium injection housing
Optic	: 36° Reflector
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Recessed mounted
Light Source	: COB LED
Electronic Control	: On/Off

#### Optical & Electrical Features

Power Consumption	: 8 W
Final Luminous Flux	: 848 lm
Efficacy	: 106 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: $\cos \phi > 0,9$
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

\* There is  $\pm 10\%$  Tolerance in Technical Values.

### Photometric Curve

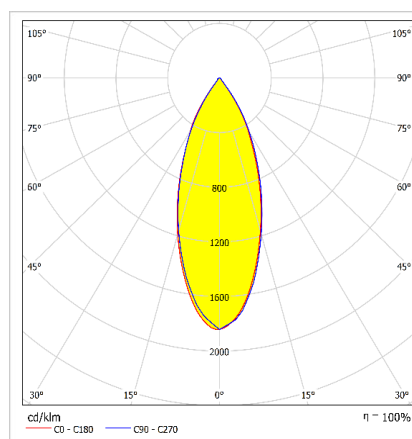

#### Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Operating Temperature Range With Emergency Kit	: +5 °C / +35 °C
Impact Resistance	: IK02
Led Life Time - L70	: 72.000 saat @Ta= 35 °C

#### Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 6500K
Emergency Kit Options	: 1 / 3 hours
DALI Option	: Yes
Degree Option	: 24° / 60°



# SQUARE

Recessed Mounted 8 W Spot LED Luminaire

3216603 SQR 008A 40SD00 36 0K8 9090 KR FL FLP

## Dimensions (mm)

	a	b	h	ØD
Standard	90	90	95	76

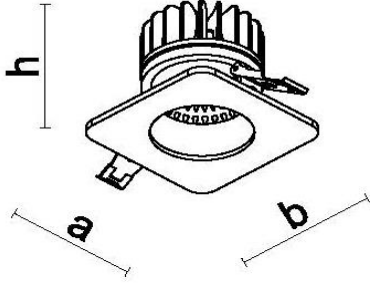

## Weight (kg)

Standard	0,28
----------	------



- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY  
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
www.eaeaydinlatma.com.tr

Revision date: 24.11.2022