



# SQUARE

Recessed Mounted 12 W Spot LED Luminaire

Order Code : 3216783  
Product Code : SQR 012A 40SD00 36 1K3 1717 KR FL FLP



## Product Data

### Standard Features


Housing	: Aluminium injection housing
Optic	: 36° Reflector
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Recessed mounted
Light Source	: COB LED
Electronic Control	: On/Off

### Optical & Electrical Features

Power Consumption	: 12 W
Final Luminous Flux	: 1272 lm
Efficacy	: 106 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

\* There is ± 10% Tolerance in Technical Values.

## Photometric Curve

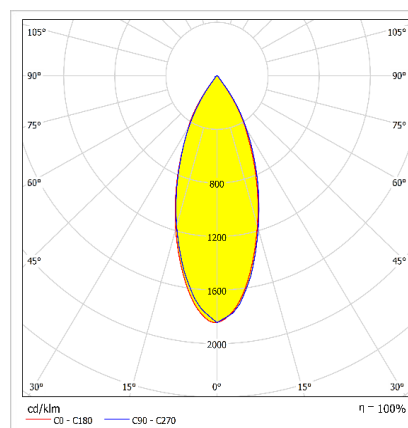

### Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Operating Temperature Range With Emergency Kit	: +5 °C / +35 °C
Impact Resistance	: IK02
Led Life Time - L70	: 72.000 saat @Ta= 35 °C

### Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 6500K
Emergency Kit Options	: 1 / 3 hours
DALI Option	: Yes
Degree Option	: 24° / 60°


# SQUARE

Recessed Mounted 12 W Spot LED Luminaire

3216783 SQR 012A 40SD00 36 1K3 1717 KR FL FLP

## Dimensions (mm)

	a	b	h	ØD
Standard	170	170	105	152

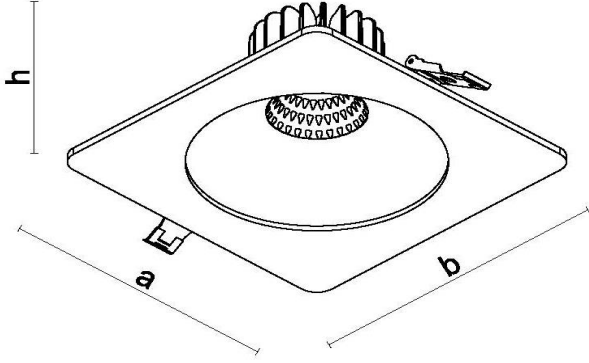

## Weight (kg)

Standard	0,40
----------	------



- EAE, reserves the right to make changes without prior notice.



**engineering the light**

EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY

Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90

www.eaeaydinlatma.com.tr

Revision date: 24.11.2022