




Recessed Mounted 8 W Spot LED Luminaire



Photometric Curve

| | |
|--------------------|-------------------------------|
| Housing | : Aluminium injection housing |
| Optic | : 36° Reflector |
| Ceiling Type | : Plasterboard |
| IP Grade | : IP20 |
| Installation | : Recessed mounted |
| Light Source | : COB LED |
| Electronic Control | : On/Off |

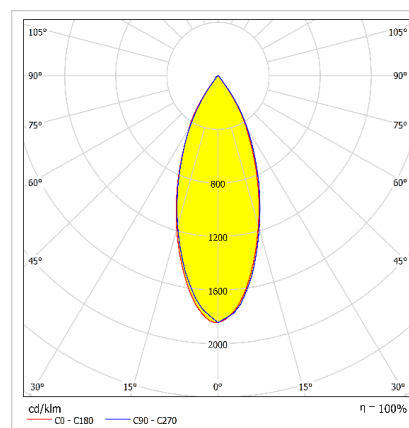

| | |
|------------------------------|----------------|
| Power Consumption | : 8 W |
| Final Luminous Flux | : 848 lm |
| Efficacy | : 106 lm/W |
| Input Voltage | : 220-240 V AC |
| Frequency | : 50-60 Hz |
| Power Factor | : Cos Ø > 0,9 |
| Correlated Color Temperature | : 4000K |
| Color Rendering Index | : >80 |

* There is $\pm 10\%$ Tolerance in Technical Values.

| | |
|---|--------------------------|
| Operating Temperature Range | : -5 °C / +35 °C |
| Operating Temperature Range With Emergency Kit | : +5 °C / +35 °C |
| Impact Resistance | : IK02 |
| Led Life Time - L70 | : 72.000 saat @Ta= 35 °C |

| | |
|-------------------------------|-------------------------|
| Correlated Color Temperatures | : 2700K / 3000K / 6500K |
| Emergency Kit Options | : 1 / 3 hours |
| DALI Option | : Yes |
| Deegree Option | : 24° / 60° |


SQUARE

Recessed Mounted 8 W Spot LED Luminaire

3241051 SQR 008A 40SD00 36 0K8 1414 KR FL FLP

Dimensions (mm)

| | a | b | h | ØD |
|----------|-----|-----|-----|-----|
| Standard | 140 | 140 | 115 | 127 |

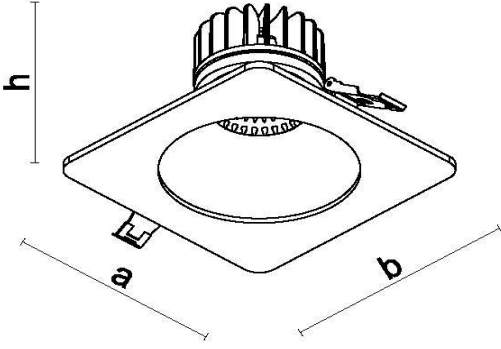

Weight (kg)

| | |
|----------|------|
| Standard | 0,35 |
|----------|------|



- EAE, reserves the right to make changes without prior notice.



engineering the light

EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY

Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90

www.eaeaydinlatma.com.tr

Revision date: 24.11.2022