



## S-NAIL MIDI

20 W Recessed Mounted Spot  
LED Luminaire

Order Code : 3263788  
Product Code : SNL 020A 40CM00 30 LLL MD V.2 FLP

### Product Data

#### Standard Features

Housing	: Aluminium Injection Housing
Optic	: 30° Reflector
Ceiling Type	: Plasterboard
IP Grade	: IP 20
Installation	: Recessed Mounted
Light Source	: COB LED


#### Optical & Electrical Features

Power Consumption	: 20 W
Final Luminous Flux	: 2017 lm
Efficacy	: 100,87 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

\* There is ± 10% Tolerance in Technical Values.



### Photometric Curve

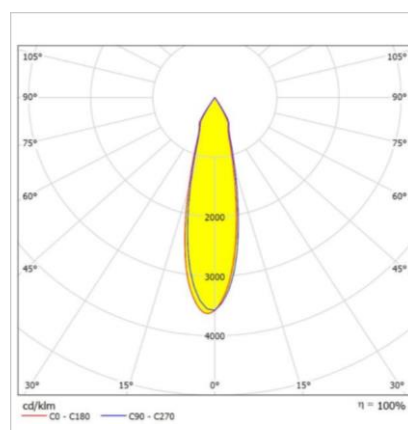

#### Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Operating Temperature Range With	: +5 °C / +35 °C
Emergency Kit	
Impact Resistance	: IK03
Led Life Time - L70	: 72.000 hours @Ta= 35 °C

#### Optional Features

Correlated Color Temperatures	: 2700 / 3000K / 6500K
Emergency Kit Options	: 1 / 3 Hours
DALI Option	: Yes
Degree Option	: 15° / 45°



## S-NAIL MIDI

20 W Recessed Mounted Spot LED Luminaire

3263788 SNL 020A 40CM00 30 LLL MD V.2 FLP

### Dimensions (mm)

	Ø	h	Ø D
Standart	153	125	145

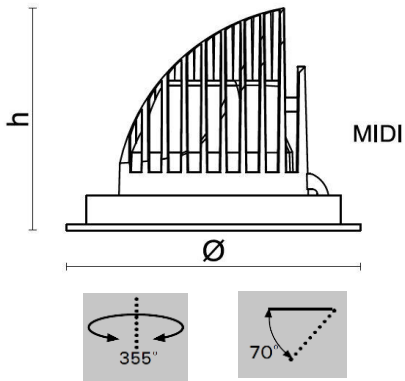

### Weight (kg)

Standart	0.940
----------	-------



- EAE, reserves the right to make changes without prior notice.



Revision date: 05.06.2023