



S-NAIL MIDI

30 W Recessed Mounted Spot
LED Luminaire

Order Code : 3244245
Product Code : SNL 030A 40CM00 45 LLL MD V.2 FLP

Product Data

Standard Features

Housing	: Aluminium Injection Housing
Optic	: 45° Reflector
Ceiling Type	: Plasterboard
IP Grade	: IP 20
Installation	: Recessed Mounted
Light Source	: COB LED


Optical & Electrical Features

Power Consumption	: 30 W
Final Luminous Flux	: 3026 lm
Efficacy	: 100,87 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

* There is ± 10% Tolerance in Technical Values.



Photometric Curve

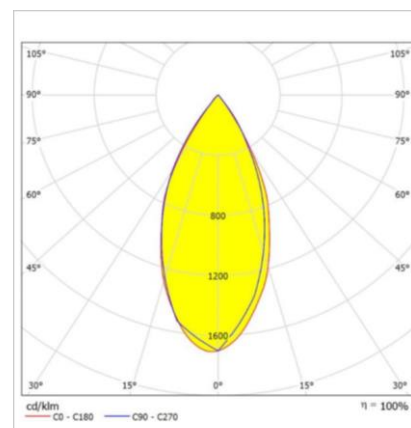

Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Operating Temperature Range With	: +5 °C / +35 °C
Emergency Kit	
Impact Resistance	: IK03
Led Life Time - L70	: 72.000 hours @Ta= 35 °C

Optional Features

Correlated Color Temperatures	: 2700 / 3000K / 6500K
Emergency Kit Options	: 1 / 3 Hours
DALI Option	: Yes
Degree Option	: 15° / 30°



S-NAIL MIDI

30 W Recessed Mounted Spot LED Luminaire

3244245 SNL 030A 40CM00 45 LLL MD V.2 FLP

Dimensions (mm)

	Ø	h	Ø D
Standart	153	125	145

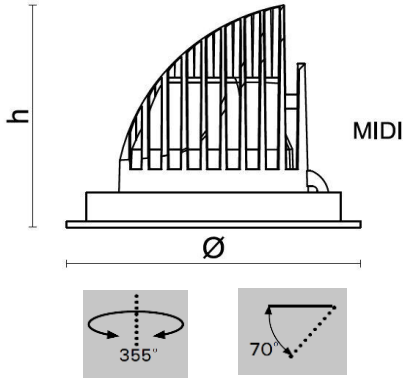

Weight (kg)

Standard	0.940
----------	-------



- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 05.06.2023