



# Emergency Lighting PONDA

18 W Emergency Lighting LED Luminaire

Order Code : 3267004  
Product Code : EXT 018U 65LN02 1K7 40 PND FLP



## Product Data

### Standard Features

Housing	: Iron sheet housing with electrostatic paint
IP Grade	: IP40
Installation	: Surface mounted
Light Source	: Mid power LED
Emergency Kit	: 3 Hours Battery
Run Mode	: Non-maintained

### Optical & Electrical Features


Power Consumption	: 18 W
Final Luminous Flux	: 1731 lm
Efficacy	: 96.1 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: $\cos \phi > 0,9$
Correlated Color Temperature	: 6500K
Color Rendering Index	: >80

\* There is  $\pm 10\%$  Tolerance in Technical Values.

### Other Features & Conditions

Operating Temperature Range With Emergency Kit	: $+10^{\circ}\text{C} / +35^{\circ}\text{C}$
Impact Resistance	: IK02
Led Life Time - L70	: > 50.000 hours @Ta= 35 °C

## Photometric Curve

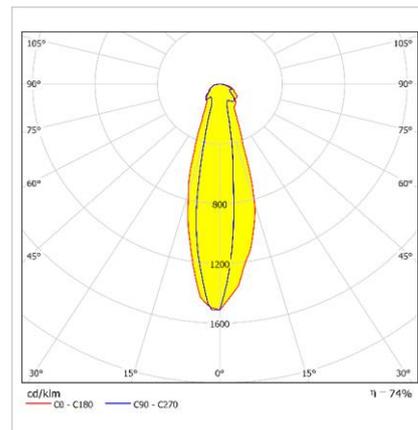


### Optional Features

Electronic Control : Self/Test, DALI

# Emergency Lighting PONDA

18 W Emergency Lighting LED Luminaire

3267004 EXT 018U 65LN02 1K7 40 PND FLP

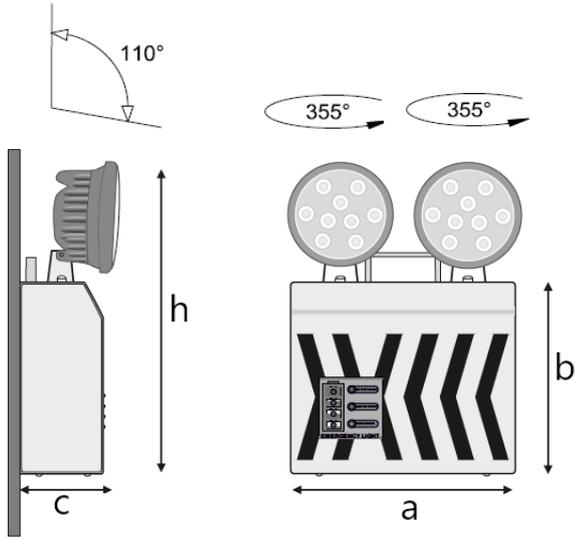

## Dimensions (mm)

	a	b	c	h
Standard	215	190	90	300

## Weight (kg)

Standard	5,4
----------	-----



- The device needs to be charged and discharged for 48 hours twice. After the third 48-hour charge, it will run for 3 hours.
- EAE, reserves the right to make changes without prior notice.

**engineering the light**

EAE Aydınlatma A.Ş.  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY  
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
www.eaeaydinlatma.com.tr

Revision date: 18.12.2023