

BRICK V.2 Surface Mounted

Sıva Üstü 10 W Spot LED Aydınlatma Armatürü

Order Code : 3241898
Product Code : BRK 010U 40SD00 36 1K1 V.2 FLP



Product Data

Standard Features


Housing	: Aluminium housing
Optic	: 36° Reflector
Ceiling Type	: Surface mounted
IP Grade	: IP20
Installation	: Surface mounted
Light Source	: COB LED
Electronic Control	: On/Off

Optical & Electrical Features

Power Consumption	: 10 W
Final Luminous Flux	: 1099 lm
Efficacy	: 110 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

* There is ± 10% Tolerance in Technical Values.

Photometric Curve

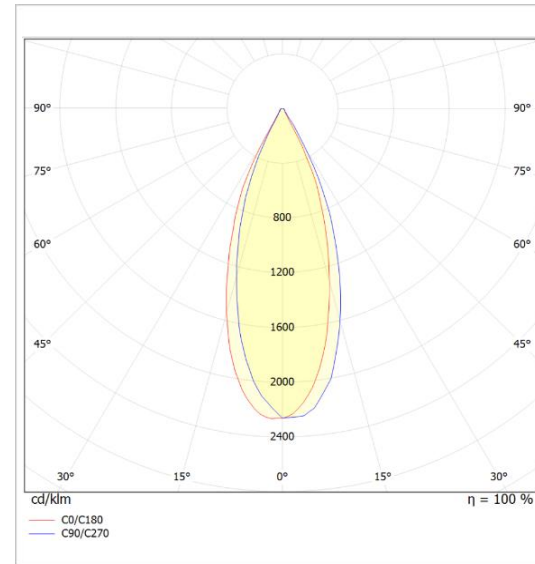

Other Features & Conditions

Operating Temperature Range	: -5°C / +35 °C
Impact Resistance	: IK03
Led Life Time - L70	: > 72.000 hours @Ta= 35 °C

Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 6500K
Emergency Kit Options	: None
DALI Option	: Yes
Degree Option	: 24°

BRICK V.2 Surface Mounted

Recessed Mounted 10 W Spot LED Luminaire



3241898 BRK 010U 40SD00 36 1K1 V.2 FLP

Dimensions (mm)

	a	b	h
Standard	80	80	200

Weight (kg)

Standard	0.900
----------	-------

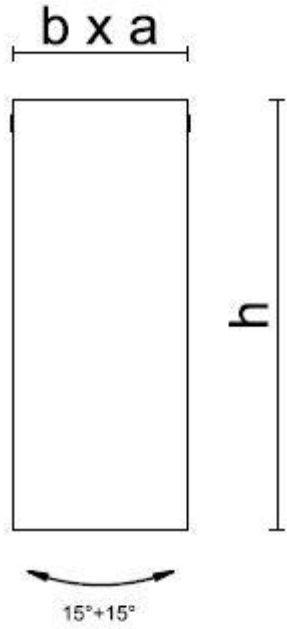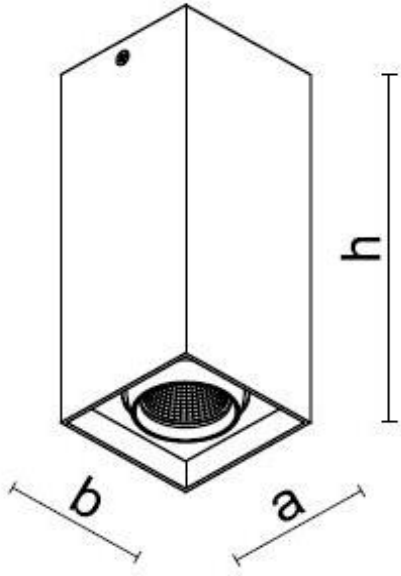

- EAE, reserves the right to make changes without prior notice.

engineering the light

EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 09.12.2022