

# BRICK V.2

## Surface Mounted

Surface Mounted 12 W Spot LED Luminaire

Order Code : 3241899  
Product Code : BRK 012U 40SD00 36 1K2 V.2 FLP



### Product Data

#### Standard Features


|                    |                     |
|--------------------|---------------------|
| Housing            | : Aluminium housing |
| Optic              | : 36° Reflector     |
| Ceiling Type       | : Surface mounted   |
| IP Grade           | : IP20              |
| Installation       | : Surface mounted   |
| Light Source       | : COB LED           |
| Electronic Control | : On/Off            |

#### Optical & Electrical Features

|                              |                |
|------------------------------|----------------|
| Power Consumption            | : 12 W         |
| Final Luminous Flux          | : 1195 lm      |
| Efficacy                     | : 99.5 lm/W    |
| Input Voltage                | : 220-240 V AC |
| Frequency                    | : 50-60 Hz     |
| Power Factor                 | : Cos Ø > 0,9  |
| Correlated Color Temperature | : 4000K        |
| Color Rendering Index        | : >80          |

\* There is ± 10% Tolerance in Technical Values.

### Photometric Curve

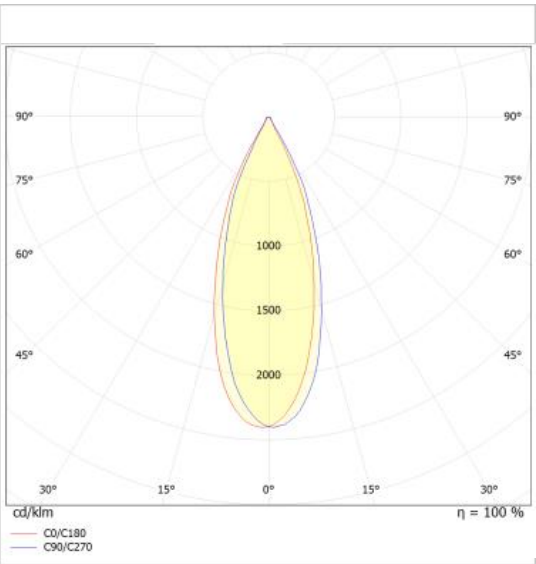

#### Other Features & Conditions

|                             |                             |
|-----------------------------|-----------------------------|
| Operating Temperature Range | : -5°C / +35 °C             |
| Impact Resistance           | : IK03                      |
| Led Life Time - L70         | : > 72.000 hours @Ta= 35 °C |

#### Optional Features

|                               |                         |
|-------------------------------|-------------------------|
| Correlated Color Temperatures | : 2700K / 3000K / 6500K |
| Emergency Kit Options         | : None                  |
| DALI Option                   | : Yes                   |
| Degree Option                 | : 24° / 36°             |

# BRICK V.2 Surface Mounted

Recessed Mounted 12 W Spot LED Luminaire



3241899 BRK 012U 40SD00 36 1K2 V.2 FLP

## Dimensions (mm)

|          | a  | b  | h   |
|----------|----|----|-----|
| Standard | 80 | 80 | 200 |

## Weight (kg)

|          |       |
|----------|-------|
| Standard | 0.900 |
|----------|-------|

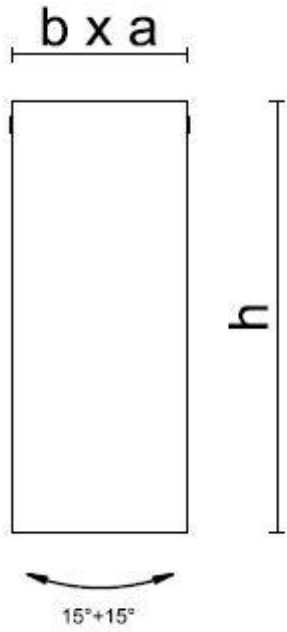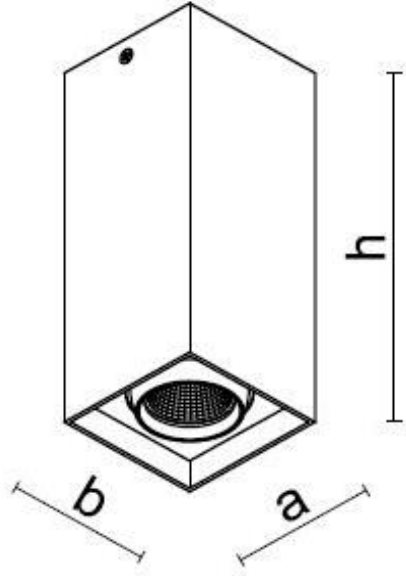

- EAE, reserves the right to make changes without prior notice.

**engineering the light**

EAE Aydınlatma A.Ş.  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY  
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
[www.eaeaydinlatma.com.tr](http://www.eaeaydinlatma.com.tr)

Revision date: 09.12.2022