



Recessed Mounted 14 W Spot LED Lighting Luminaire



Photometric Curve

Power Consumption	: 14 W
Final Luminous Flux	: 1516 lm
Efficacy	: 108.3 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

* There is $\pm 10\%$ Tolerance in Technical Values.

Operating Temperature Range	: -5 °C / +35 °C
Operating Temperature Range With Emergency Kit	: +5 °C / +35 °C
Impact Resistance	: IK03
LED Life Time - L70	: 72.000 saat @Ta= 35 °C

Correlated Color Temperatures	: 3000K / 6500K
Emergency Kit Options	: 1 / 3 Hours
DALI Option	: Yes



DOWNLED-Ø175

Recessed Mounted 14 W Spot LED Lighting Luminaire

3254722 DWL 014A 40PC00 1K7 06 20 V.2 FLP

Dimensions (mm)

	Ø	h	Ø D
Recessed Mounted	175	35	160

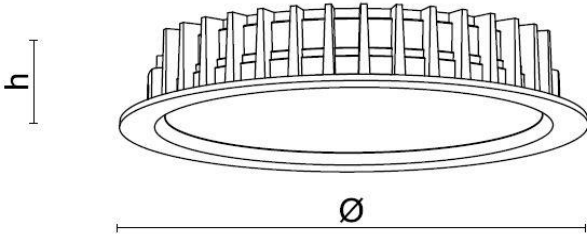

Weight (kg)

Standard	0.450
----------	-------

- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL -TURKEY
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 29.07.2024

