



## STL FLP

24 W Surface Mounted Single Module Linear LED Luminaire

Order Code : 3304206  
Product Code : STL 024U 400D00 1K9 5070TK3I 150 FLP

### Product Data

#### Standard Features

Housing	: Aluminium Extrusion Housing
Diffuser	: Opal Diffuser
IP Grade	: IP20
Installation	: Surface Mounted
Light Source	: Mid Power LED
Electronic Control	: On/Off

#### Optical & Electrical Features

Power Consumption	: 24 W
Final Luminous Flux	: 1838,4 lm
Efficacy	: 79,1 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos $\phi$ > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80


\* There is  $\pm 10\%$  Tolerance in Technical Values.

#### Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Operating Temperature Range With	: +5 °C / +35 °C
Emergency Kit	
Impact Resistance	: IK03
Led Life Time - L70	: 100.000 hours @Ta= 35 °C



### Photometric Curve

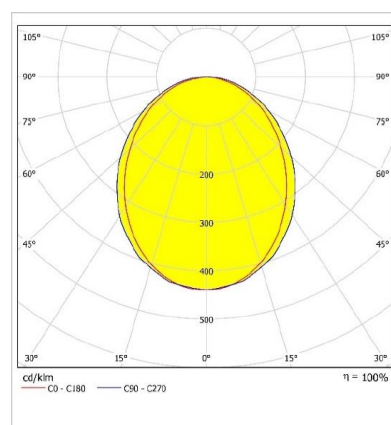

#### Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 6500K
Emergency Kit Options	: 1 / 3 Hours
DALI Option	: Yes


# STL FLP

24 W Surface Mounted Single Module Linear LED Luminaire

3304206 STL 024U 40OD00 1K9 5070TK3I 150 FLP

## Dimensions (mm)

	a	b	h
Single Module	1500	50	70

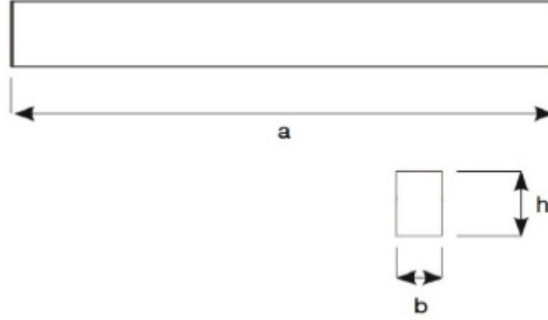

- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL -TURKEY  
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
[www.eaeaydinlatma.com.tr](http://www.eaeaydinlatma.com.tr)

Revision date: 18.08.2023