



STL FLP

60 W Surface Mounted Single Module Linear LED Luminaire

Order Code : 3241325
Product Code : STL 060U 400D00 5K9 5070TK3I 180 FLP


Product Data

Standard Features

Housing	: Aluminium extrusion housing
Diffuser	: Glare minimizing highly permeable diffuser
IP Grade	: IP20
Installation	: Surface mounted
Light Source	: Mid Power LED
Electronic Control	: On/Off



Photometric Curve

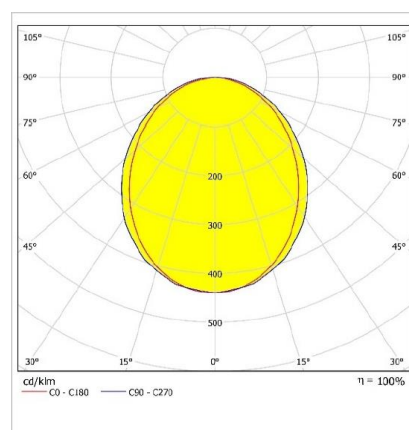

Optical & Electrical Features

Power Consumption	: 60 W
Final Luminous Flux	: 5814,6 lm
Efficacy	: 96,91 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

* There is ± 10% Tolerance in Technical Values.

Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Operating Temperature Range With	: +5 °C / +35 °C
Emergency Kit	
Impact Resistance	: IK03
Led Life Time - L70	: 100.000 hours @Ta= 35 °C

Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 6500K
Emergency Kit Options	: 1 / 3 hours
DALI Option	: Yes


STL FLP

60W Surface Mounted Single Module Linear LED Luminaire

3241325 STL 060U 40OD00 5K9 5070TK3I 180 FLP

Dimensions (mm)

	a	b	h
Single Module	1800	50	70

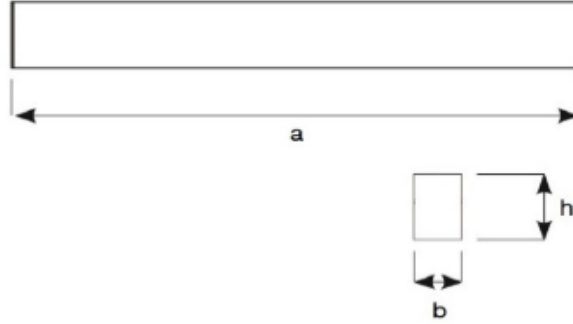

- EAE, reserves the right to make changes without prior notice.

engineering the light

EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL -TURKEY
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 28.02.2023