



EXIT ELOTTI SLIM

3 W Emergency Lighting LED Luminaire

Order Code : 3203678
Product Code : EXT 003U 65SD02 237 65 ELT SLM STD FLP



Product Data

Standard Features


Housing	: White polycarbonate housing
IP Grade	: IP65
Installation	: Surface mounted
Light Source	: Mid power LED
Emergency Kit Options	: 1 - 3 hours
Run Mode	: Maintained / Non-maintained

Optical & Electrical Features

Power Consumption	: 3 W
Final Luminous Flux	: 252 lm
Efficacy	: 84 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos ϕ > 0,9
Correlated Color Temperature	: 6500K
Color Rendering Index	: >80

* There is \pm 10% Tolerance in Technical Values.

Photometric Curve

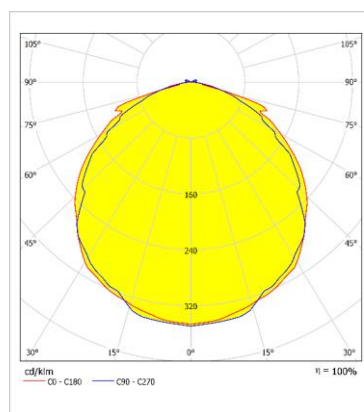

Other Features & Conditions

Operating Temperature Range With Emergency Kit	: +10 °C / +35 °C
Impact Resistance	: IK07
Led Life Time - L70	: > 50.000 hours @Ta= 35 °C



Optional Features

Electronic Control : Self/Test, DALI

EXIT ELOTTI SLIM

3 W Emergency Lighting LED Luminaire

3203678 EXT 003U 65SD02 237 65 ELT SLM STD FLP

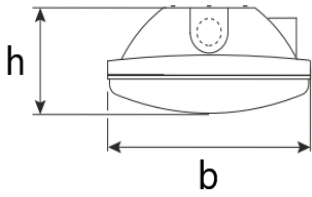
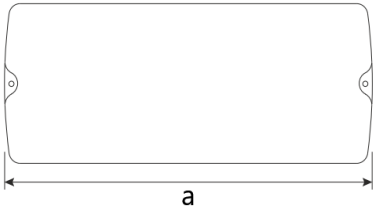


Dimensions (mm)

	a	b	h
Standard	285	130	71

Weight (gr)

Standard	650
----------	-----



Order Code : 3203680

Product Code : EXT ELT SLM CIFT YUZLU YON LEVHASI FLP

Dimensions (mm)

	a	b
Standart	235	120

- EAE, reserves the right to make changes without prior notice.

engineering the light

EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 2.04.2024