



## EXIT ELOTTI MAXI

3 W Emergency Lighting LED Luminaire

Order Code : 3203682  
Product Code : EXT 003U 65SD02 237 65 ELT MX STD FLP



### Product Data

#### Standard Features


Housing	: White Polycarbonate Housing
IP Grade	: IP65
Installation	: Surface Mounted
Light Source	: Mid Power LED
Emergency Kit Options	: 1 - 3 Hours
Run Mode	: Maintained

#### Optical & Electrical Features

Power Consumption	: 3 W
Final Luminous Flux	: 252 lm
Efficacy	: 84 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: $\cos \phi > 0,9$
Correlated Color Temperature	: 6500K
Color Rendering Index	: >80

\* There is  $\pm 10\%$  Tolerance in Technical Values.

### Photometric Curve

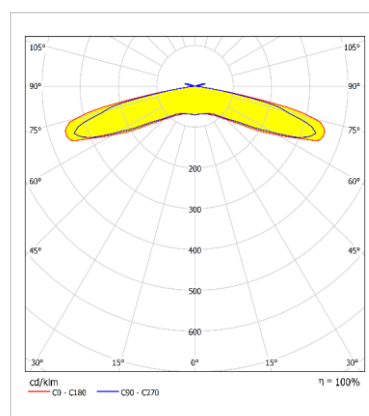

#### Other Features & Conditions

Operating Temperature Range With Emergency Kit	: +10 °C / +35 °C
Impact Resistance	: IK07
Led Life Time - L70	: > 50.000 hours @Ta= 35 °C



#### Optional Features

Electronic Control	: Self/Test, DALI
Run Mode	: Non maintained

# EXIT ELOTTI MAXI

3 W Emergency Lighting LED Luminaire

3203682 EXT 003U 65SD02 237 65 ELT MX STD FLP


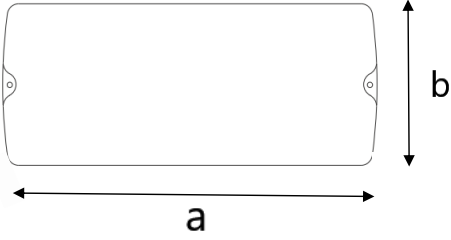


## Dimensions (mm)

	a	b	h
Standard	360	150	71

## Weight (gr)

Standard	800
----------	-----

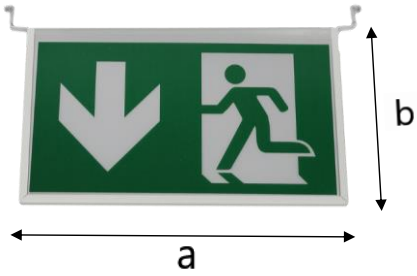

Order Code : 3203681  
Product Code : EXT ELT STD CIFT YUZLU YON LEVHASI FLP  
Dimensions (mm)

	a	b
Standart	300	150

- The device needs to be charged and discharged for 48 hours twice. After the third 48-hour charge, it will run for 3 hours.
- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.  
İktisadi Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başaşehir / İSTANBUL-TURKEY  
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
www.eaeaydinlatma.com.tr

Revision Date: 2.04.2024