



ORI-K MINI

Recessed Mounted 10 W Spot LED Luminaire

Order Code : 3201922
Product Code : ORI 010A 40SD00 36 1K1 20 MN KR FLP



Product Data

Standard Features


Housing	: Aluminium housing
Optic	: 36° Reflector
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Recessed mounted
Light Source	: COB LED
Electronic Control	: On/Off

Optical & Electrical Features

Power Consumption	: 10 W
Final Luminous Flux	: 1066 lm
Efficacy	: 106.6 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

* There is $\pm 10\%$ Tolerance in Technical Values.

Photometric Curve

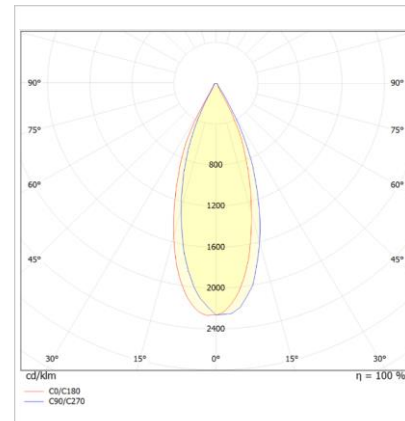

Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Operating Temperature Range With	: +5 °C / +35 °C
Emergency Kit	
Impact Resistance	: IK03
Led Life Time - L70	: 72.000 saat @Ta= 35 °C


Optional Features

Correlated Color Temperatures	: 2700 / 3000K / 6500K
Emergency Kit Options	: 1 / 3 hours
DALI Option	: Yes
Degree Option	: 24°

ORI MINI


Recessed Mounted 10 W Spot LED Luminaire

3201922 ORI 010A 40SD00 36 1K1 20 MN KR FLP

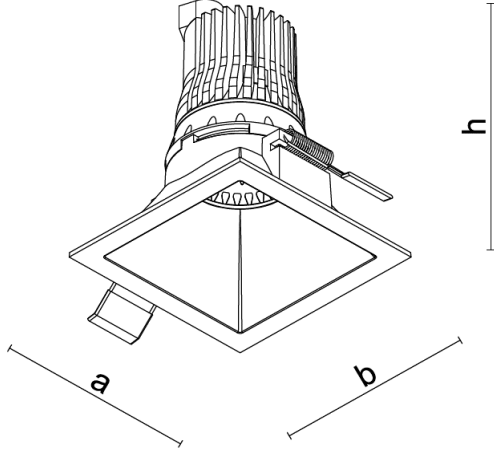

Dimensions (mm)


	a	b	h	d ¹ , d ²
Standard	85	85	115	75x75



Weight (kg)

Standard	0.290
----------	-------

- EAE, reserves the right to make changes without prior notice.



Revision date: 26.01.2023