



## ORI-K MINI

Recessed Mounted 14 W Spot LED Luminaire

Order Code : 3238715  
Product Code : ORI 014A 40SD00 36 1K4 20 MN KR FLP



### Product Data

#### Standard Features


Housing	: Aluminium housing
Optic	: 36° Reflector
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Recessed mounted
Light Source	: COB LED
Electronic Control	: On/Off

#### Optical & Electrical Features

Power Consumption	: 14 W
Final Luminous Flux	: 1370 lm
Efficacy	: 97.8 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

\* There is ± 10% Tolerance in Technical Values.

### Photometric Curve

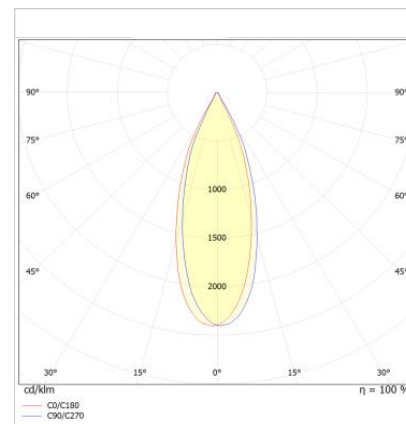

#### Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Operating Temperature Range With	: +10 °C / +35 °C
Emergency Kit	
Impact Resistance	: IK03
Led Life Time - L70	: 72.000 saat @Ta= 35 °C


#### Optional Features

Correlated Color Temperatures	: 2700 / 3000K / 6500K
Emergency Kit Options	: 1 / 3 hours
DALI Option	: Yes
Degree Option	: 24°

## ORI-K MINI


Recessed Mounted 14 W Spot LED Luminaire

3238715 ORI 014A 40SD00 36 1K4 20 MN KR FLP

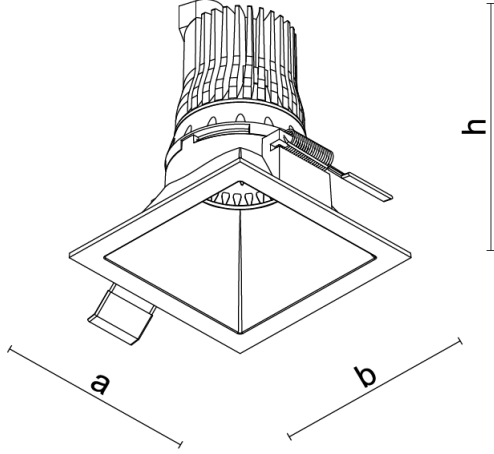

### Dimensions (mm)

	a	b	h	d <sup>1</sup> , d <sup>2</sup>
Standard	85	85	115	75x75



### Weight (kg)

Standard	0.290
----------	-------



- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY  
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
www.eaeaydinlatma.com.tr

Revision date: 26.01.2023