



## GIZA V.2

Recessed Mounted 10 W Spot LED Luminaire

Order Code : 3202090  
Product Code : GZA 010A 40LN00 80 1K1 20 FLP



### Product Data

#### Standard Features


Housing	: Aluminium housing
Optic	: 80° Lens + Reflector (Black)
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Recessed mounted
Light Source	: SMD LED
Electronic Control	: On/Off

#### Optical & Electrical Features

Power Consumption	: 10 W
Final Luminous Flux	: 1076 lm
Efficacy	: 107.6 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos $\phi$ > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

\* There is  $\pm$  10% Tolerance in Technical Values.

### Photometric Curve

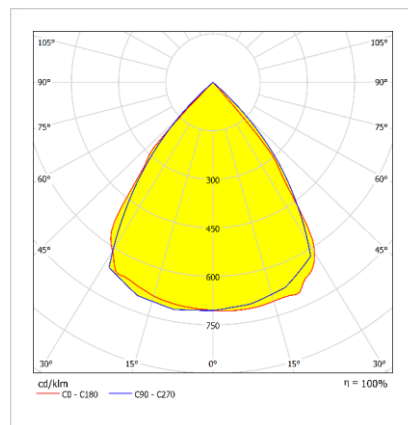

#### Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Operating Temperature Range With Emergency Kit	: +5 °C / +35 °C
Impact Resistance	: IK03
Led Life Time - L70	: 72.000 saat @Ta= 35 °C

#### Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 6500K
Emergency Kit Options	: 1 / 3 hours
DALI Option	: Yes
Degree Option	: 50°



## GIZA V.2

### Recessed Mounted 10 W Spot LED Luminaire

3202090 GZA 010A 40LN00 80 1K1 20 FLP

#### Dimensions (mm)

	a	b	h	d <sup>1</sup> , d <sup>2</sup>
Standard	100	100	75	90x90

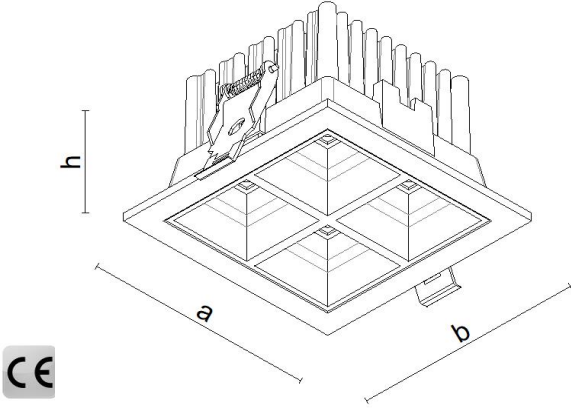

#### Weight (kg)

Standard	0.460
----------	-------

- EAE, reserves the right to make changes without prior notice.

 **engineering the light**

EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY

Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90

[www.eaeaydinlatma.com.tr](http://www.eaeaydinlatma.com.tr)

Revision date: 06.10.2022