



EXIT MINOLITE

4 W Emergency Lighting LED Luminaire

Order Code : 3203676
Product Code : EXT 004U 65SD02 237 40 MNT STD FLP



Product Data

Standard Features


Housing	: White Polycarbonate Housing
IP Grade	: IP40
Installation	: Surface mounted
Light Source	: Mid Power LED
Emergency Kit Options	: 3 Hours
Run Mode	: Maintained

Optical & Electrical Features

Power Consumption	: 4 W
Final Luminous Flux	: 237 lm
Efficacy	: 59.25 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: $\cos \phi > 0,9$
Correlated Color Temperature	: 6500K
Color Rendering Index	: >80

* There is $\pm 10\%$ Tolerance in Technical Values.

Photometric Curve

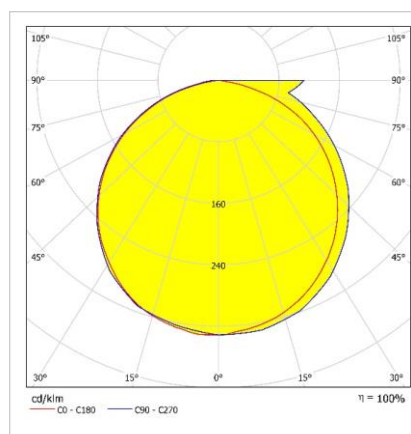

Other Features & Conditions

Operating Temperature Range With Emergency Kit	: $+10\text{ }^{\circ}\text{C}/+35\text{ }^{\circ}\text{C}$
Impact Resistance	: IK03
Led Life Time - L70	: > 50.000 hours @ $T_a = 35\text{ }^{\circ}\text{C}$


Optional Features

Electronic Control	: Self/Test, DALI
Run Mode	: Non Maintained

EXIT MINOLITE


4 W Emergency Lighting LED Luminaire

3203676 EXT 004U 65SD02 237 40 MNT STD FLP

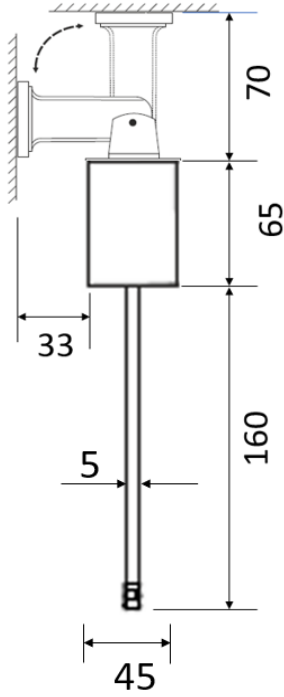


Dimensions (mm)

	a	b	h
Standard	330	310	225

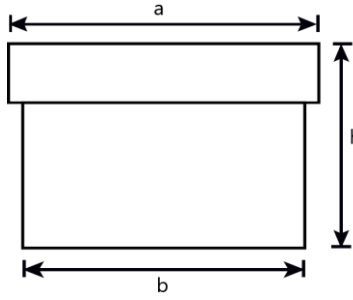

Weight (gr)

Standard	360
----------	-----

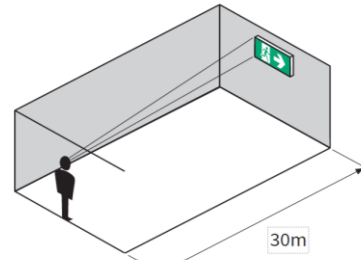

Order Code : 1031392
Product Code : EXIT MNT STD DUVAR MNTJ APARATI FLP

- The device needs to be charged and discharged for 48 hours twice. After the third 48-hour charge, it will run for 3 Hours.
- EAE, reserves the right to make changes without prior notice.

engineering the light

EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision Date: 22.02.2024