



STL-FLP RECESSED

50 W Recessed Mounted Single Module Linear LED Luminaire

Order Code : 3242423
Product Code : STL 050A 400D00 4K9 6770TK3I 150 FLP



Product Data

Standard Features


Housing	: Aluminium Extrusion Housing
Diffuser	: Opal Diffuser
IP Grade	: IP20
Installation	: Recessed Mounted
Light Source	: Mid Power LED
Electronic Control	: On/Off

Optical & Electrical Features

Power Consumption	: 50 W
Final Luminous Flux	: 4845 lm
Efficacy	: 96,91 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

* There is $\pm 10\%$ Tolerance in Technical Values.

Photometric Curve

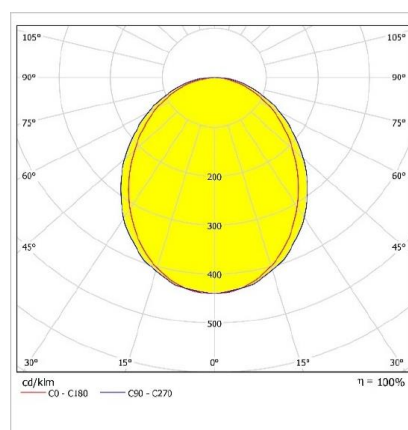

Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Operating Temperature Range With	: +5 °C / +35 °C
Emergency Kit	
Impact Resistance	: IK03
Led Life Time - L70	: 100.000 hours @Ta= 35 °C

Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 6500K
Emergency Kit Options	: 1 / 3 Hours
DALI Option	: Yes


STL-FLP RECESSED

50 W Recessed Mounted Single Module Linear LED Luminaire

3242423 STL 050A 40OD00 4K9 6770TK3I 150 FLP

Dimensions (mm)

	a	b	h	h1	d ¹ , d ²
Starting Module	1507	67	70	100	1504x54

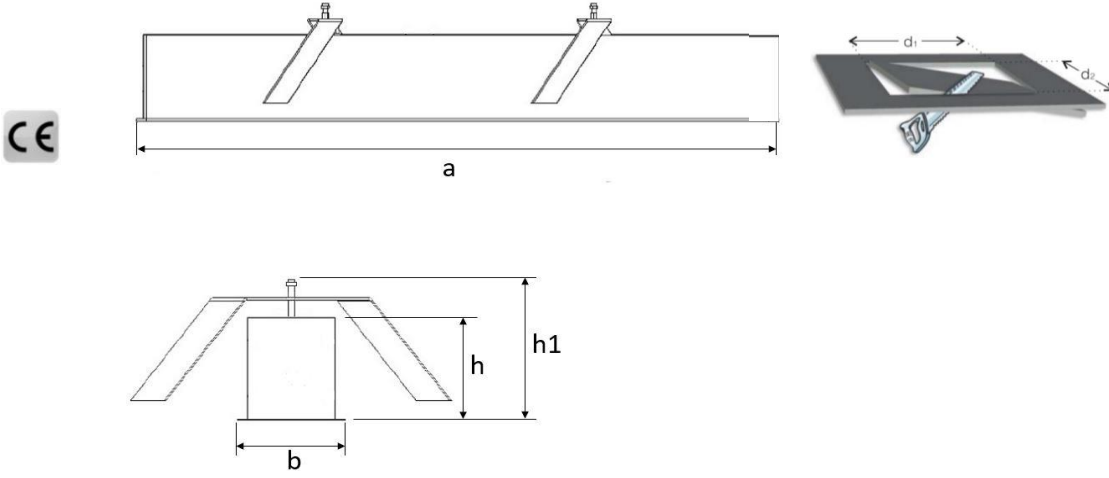

Installation System


Module Model: Single (TK)



Single (TK)

Module Model: Starting (BS)

Module Model: Finishing (SN)




Starting (BS)

Finishing (SN)

Module Model: Starting (BS)

Module Model: Intermediate (AR)

Module Model: Finishing (SN)



Starting (BS)

Intermediate (AR)

Finishing (SN)

- EAE, reserves the right to make changes without prior notice.

EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TÜRKİYE

Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90

www.eaeaydinlatma.com.tr

engineering the light

Revizyon tarihi: 19.12.2023