



STL FRAME FLP

108 W Sarkit LED Armatür

Order Code : 3301446
Product Code : STL 108S 400D00 8K6 5070TK3I 9018 FR FLP

Product Data

Standard Features

Housing	: Aluminium Extrusion Housing
Diffuser	: Glare Minimizing Highly Permeable Diffuser
IP Grade	: IP20
Installation	: Pendant
Light Source	: Mid Power LED
Electronic Control	: On/Off

Optical & Electrical Features

Power Consumption	: 108 W
Final Luminous Flux	: 8542.8 lm
Efficacy	: 79.1 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80


* There is ± 10% Tolerance in Technical Values.

Other Features & Conditions

Operating Temperature Range	: -5 °C / +35 °C
Operating Temperature Range With	: +5 °C / +35 °C
Emergency Kit	
Impact Resistance	: IK03
Led Life Time - L70	: 100.000 hours @Ta= 35 °C



Photometric Curve

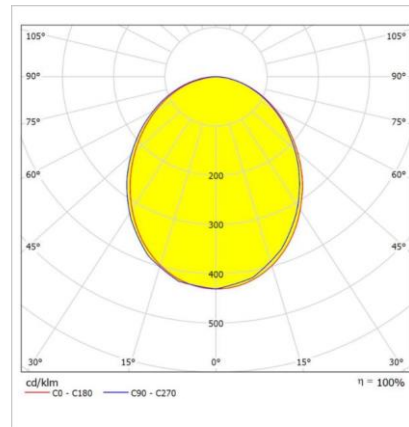


Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 6500K
Emergency Kit Options	: 1 / 3 Hours
DALI Option	: Yes

STL FRAME FLP


108 W Sarkit LED Armatür

3301446 STL 108S 40OD00 8K6 5070TK3I 9018 FR FLP

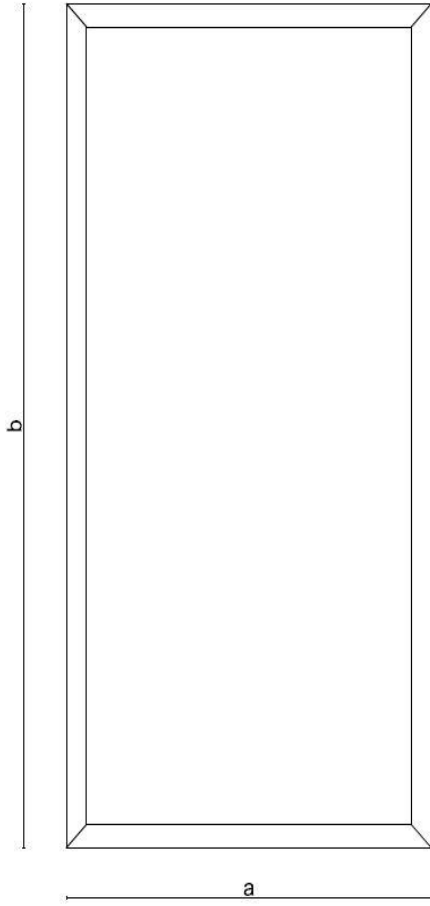

Dimensions (mm)

	a	b	h	c
Frame 180x90	900	1800	70	50



Steel Wire Suspension Kit	
Order Code	Product Code
3242453	STL ASKI TAKIMI 1,5 MT FLP
3306265	STL ASKI TAKIMI 2 MT FLP
3306266	STL ASKI TAKIMI 3 MT FLP
3306267	STL ASKI TAKIMI 4 MT FLP
3306268	STL ASKI TAKIMI 5 MT FLP

- EAE, gerekli gördüğü uygun değişiklikleri önceden bildirmeden yapma hakkına haizdir.

engineering the light

EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 25.07.2023